HOBART®

HOBART®



See us at Exhibtions in 2026

aapex show
Nov 3-5,2026 | USA
Booth Number: V5619

Bauma, Shanghai
Nov 24 -27, 2026 | China
Booth Number: N2.189

Automechanika, Shanghai
Dec 2 - 5, 2026 | China
Booth Number: 1.2N102

Australian Auto Aftermarket Expo
May 14 - 16, 2026 | Australia
Booth Number: T50h

Automechanika, Frankfurt
Sep 8 - 12, 2026 | Germany
Booth Number: 4.1 K41

AAG, Guangzhou
Aug 19 - 21, 2026 | China
Booth Number: 4F16

Guangzhou Hobart Lights Limited
2026-11 Catalog

Phone : 0086-180 2249 5831
Email : sales@hobartlights.com
Web : www.hobartlights.com
Wechat : 0086-180 2249 5831
Address : No. 1211, Asian Games Avenue, Panyu, Guangzhou, China

Wechat **Whatsapp** **E-catalog**

Catalog Link: https://hobartlights.com/page/catalog/catalog.php



关于我们

THERE'S NOTHING MORE EXCITING THAN A GREAT PRODUCT.

Our company's original intention from the very beginning was committed to solve problems for customers and to create some more unique products. Vehicles like police cars, ambulances, fire trucks, are all carry the bridge of life, and the lights used in these kind of vehicle are vital. However, there are too many low-quality products on the market, and the chain always falls off at the critical moment. We are committed to keep bringing more groundbreaking products to the market.

APPLICATION

The company focuses on new light source technology, and has developed various types of high-efficiency and environmentally friendly LED lighting lamps. Provide complete lighting and warning solutions for vehicles and machinery in various fields such as cars, commercial vehicles, trucks and buses, construction machinery, agricultural machinery, ships, etc.

STANDARD

The developed products have passed the formal professional test of the host country, and meet the domestic and foreign industry standards such as SAE, DOT, ECE, etc.

MANAGEMENT

With customer satisfaction as the goal, the company has established a quality management system from design and development to sales and service, and has passed ISO9001 and quality management system certification. With innovation as the core and integrity management as the foundation, the company is rapidly growing.

EXCLUSIVE
FI, AU, UK, IE

LH1
ECE R65 Class 2 / SAE J595 Class 1
Smokey Lens





Specification:

Part Number	:	LH1-3, LH1-4, LH1-6
Item Name	:	Light Head
Power	:	15W / 20W / 18W
LED	:	3 LED / 4 LED / 6 LED
Synchronization	:	Yellow wire
Asynchronous	:	Green Wire
Cruise Light	:	White Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65 XA2, R10
SAE Approval	:	SAE J595 Class 1
Other Approval	:	UKCA, CE
Voltage	:	12-24V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	EVA
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	100pcs/ctn

Single Color option:

Dual Color option:







Bracket is available

HD pictures link:

https://hobartlights.com/product/class/?64.html

Wiring Instruciton

Positive VDC		**Red**
Negative Ground		**Black**
Flash Pattern and SYNC		**Yellow**
Asynchronous		**Green**
Cruise Light		**White**

EXCLUSIVE
AU, UK, IE

LH1-12
Light Head with Alley Light
Smokey Lens




Both Horizontal or Vertical mounting both meet R65



Specification:


Part Number	:	LH1-12
Item Name	:	Light Head
Size	:	131x44x13mm
Power	:	24W warning, 12W alley light
LED	:	12pcs 3W
Synchronization	:	Yellow wire
Asynchronous	:	Green Wire
Alley Light	:	White Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65 class 2, ECE R10
SAE Approval	:	SAE J595 Class 1
Other Approval	:	UKCA, CE
Voltage	:	12-24V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	EVA
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	50pcs/ctn

Size:

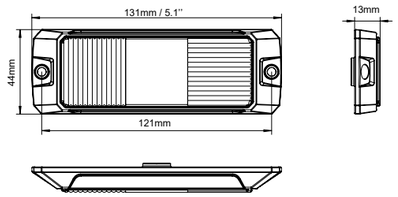

HD pictures link:

https://hobartlights.com/product/html/?260.html

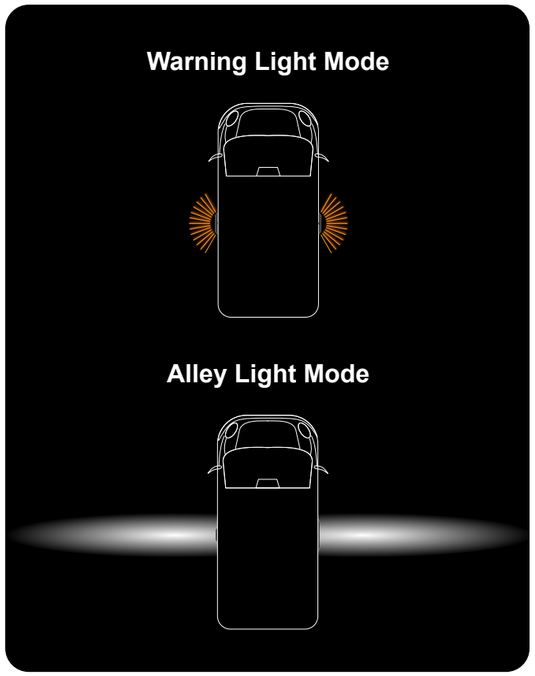


New
Oct 2026


LH1-6S

5’’ Warning Light with Signal Light


Tail, Stop, DI, DRL



LH1-6S-TS
Amber Warning Light
With Tail and Stop Light



LH1-6S-DI
Amber Warning Light
With Direction Indicator




LH1-6S-DRL
Amber Warning Light
With white DRL

Specification:

Part Number	:	LH1-6S
Item Name	:	Warning Light with Signal Light
Warning Light Power	:	18W (6 LEDs)
Signal Light Power	:	6W (30 LEDs)
SYNC Flash	:	Yellow wire
Alternately Flash	:	Green Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65 XA2, R148, R10
SAE Approval	:	SAE J595 Class 1
Other Approval	:	UKCA, CE
Voltage	:	10-30V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	EVA
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	60pcs/ctn

HD pictures link:

https://hobartlights.com/product/html/?281.html
https://hobartlights.com/product/html/?282.html
https://hobartlights.com/product/html/?283.html

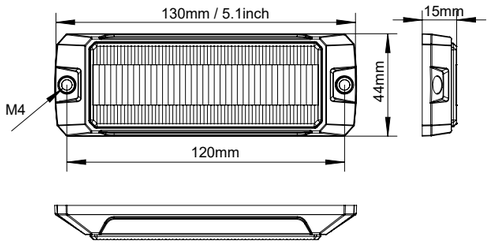

New
Oct 2026

LH3-S

10’’ Warning Light with Signal Light

Tail, Stop, DI, DRL, with Scene Light








LH3-S-TS: Amber Warning Light, Tail and Stop Light, With Scene Light
LH3-S-DI: Amber Warning Light, Direction Indicator, With Scene Light
LH3-S-DRL: Amber Warning Light, DRL, With Scene Light

Specification:

Part Number	:	LH3-S-TS, LH3-S-DI, LH3-S-DRL
Item Name	:	Warning Light with Signal Light
	:	With Scene Light
Warning Light Power	:	36W (12 LEDs)
Signal Light Power	:	9.6W (48 LEDs)
Scene Light Power	:	12W (12 LEDs)
SYNC Flash	:	Yellow wire
Alternately Flash	:	Green Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 XA2, R148, R10
SAE Approval	:	SAE J595 Class 1
Other Approval	:	UKCA, CE
Voltage	:	10-30V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	Rubber Gasket
Warranty		5 Years
Working Temp		-45°C ~ +65°C

HD pictures link:

https://hobartlights.com/product/html/?286.html
https://hobartlights.com/product/html/?287.html
https://hobartlights.com/product/html/?288.html

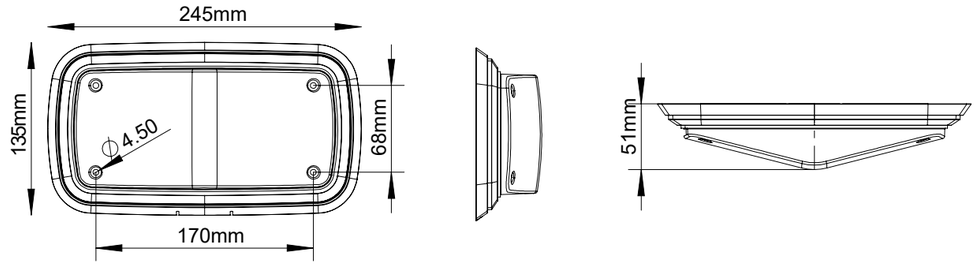

New
Oct 2026

LH3
5’’ Warning Light with Scene Light



Specification:

Part Number	:	LH3
Item Name	:	Warning Light with Scene Light
Warning Light Power	:	45.6W (12 LEDs + 48 LEDs)
Scene Light Power	:	12W (12 LEDs)
SYNC Flash	:	Yellow wire
Alternately Flash	:	Green Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 XA2, R10
SAE Approval	:	SAE J595 Class 1
Other Approval	:	UKCA, CE
Voltage	:	10-30V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	Rubber Gasket
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

HD pictures link:

https://hobartlights.com/product/html/?285.html

Single Color option:

Dual Color option:



Scene Light

Applications



New
Oct 2026

LH1-4H
5’’ Window Strobe Lights Front / Rear Window



LH1-4H
Sucker mount



LH1-4L
Screw mount

Specification:


Part Number	:	LH1-4H
Item Name	:	Window Strobe Lights
Power	:	20W
LED	:	4 LED
Mounting	:	Sucker
Cable	:	3M cable with cigarette plug
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65 XA2, R10
SAE Approval	:	SAE J595 Class 1
Other Approval	:	UKCA, CE
Voltage	:	10-30V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C


Single Color option:

Dual Color option:

HD pictures link:


https://hobartlights.com/product/html/?284.html

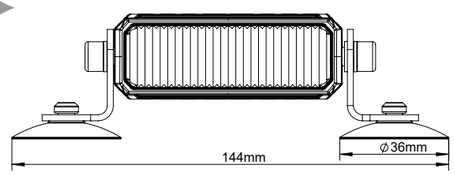




LH2, 5’’ Warning Light with Alley Light & Puddle Light For Airport


EXCLUSIVE
UK, IE

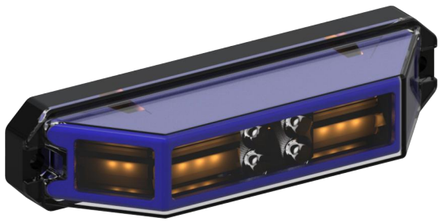




Specification:

Part Number	:	LH2
Item Name	:	Warning Light with Alley Light & Puddle Light
Warning Light	:	12pcs 3W LED
Alley Light	:	4pcs 3W White LED
Puddle light	:	2pcs 1W White LED
Size	:	130x34x30mm
Synchronization	:	Available
Asynchronous	:	Available
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65, ECE R10
SAE Approval	:	SAE J845 Class 1
Other Approval	:	UKCA, CE
Voltage	:	12-24V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount or bracket mount
Cable	:	0.25M cable
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	50pcs/ctn

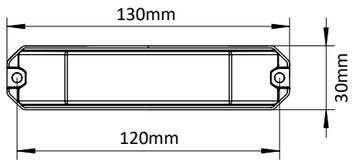



Wiring Instruction

Warning Light		**Red**	(+)
Puddle Light		**Blue**	(+)
Alley Light		**White**	(+)
Flash Pattern and SYNC		**Yellow**	(+)
Asynchronous		**Green**	(+)
Negative Ground		**Black**	(-)


HD pictures link:

https://hobartlights.com/product/html/?258.html


180° Warning Light Mode

Puddle Light Mode to ground

Alley Light Mode to alley

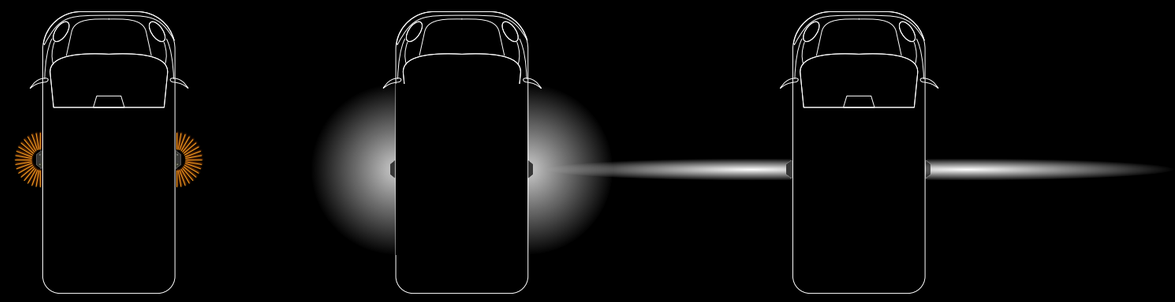


Warning light to the sky (for airport)

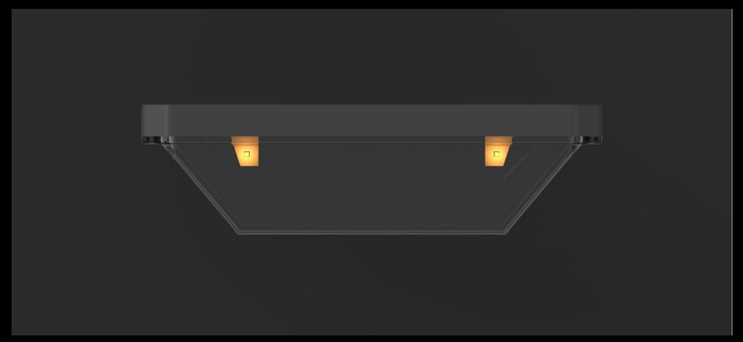

Video Link


https://youtube.com/shorts/b6DxM56OWKY


Puddle Light Mode

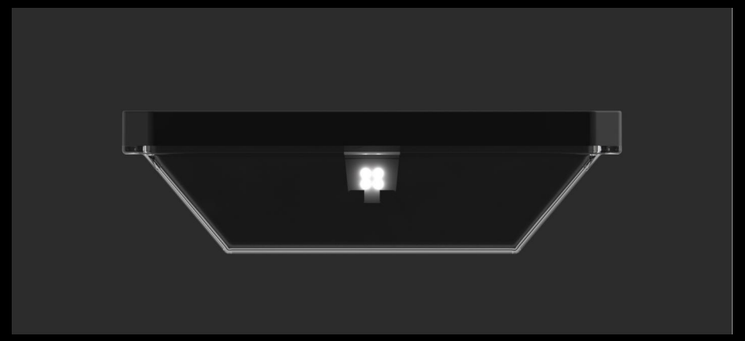

EXCLUSIVE
DE

L3-180
Corner Warning Light with Turn Signal Light
ECE R65 HTA / HTB / TA / TB / R148 Approved

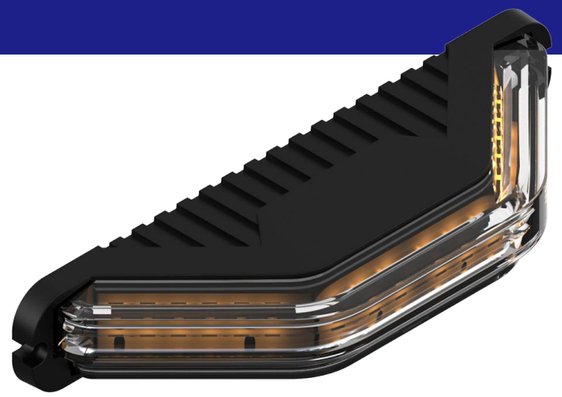

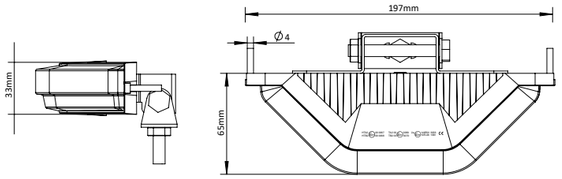

Specification:

Part Number	:	L3-180
Item Name	:	Corner Warning Light
Size	:	197x65x33mm
Warning Power	:	36W
Scene Light Power	:	9W
Synchronization	:	Yellow wire
Asynchronous	:	Green Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65 TA2 HT2 R149 R10
SAE Approval	:	SAE J845 Class 1
Other Approval	:	UKCA, CE
Voltage	:	12-24V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount or bracket mount
Cable	:	0.25M cable
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	20pcs/ctn

HD pictures link:

www.hobartlights.com/product/html/?251.html


3 different mounting way









T Mode (360°) Warning Light
SYNC & Alternately

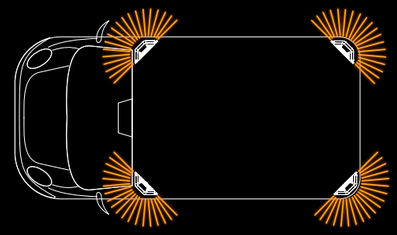

HT Mode (270°) Warning Light
SYNC & Alternately
With Turn Signal Light

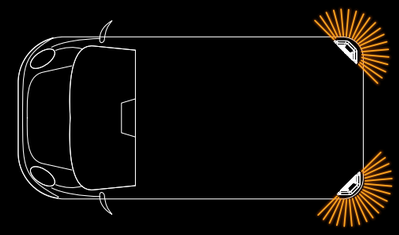

Scene Light Mode
White beam, 800LM

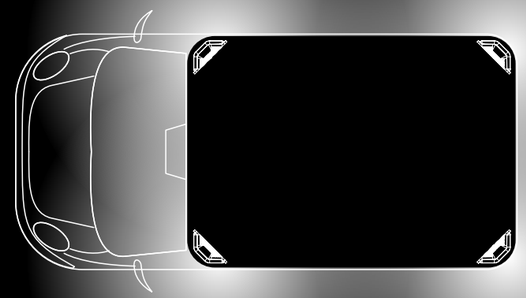

L5
Traffic Advisor / Chase Light
Warning Light with Position Light

L5-32



L5-40




L5-48




L5-56




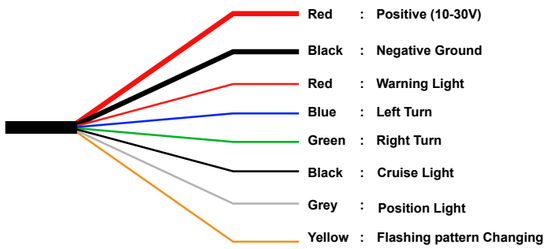

HD pictures link:


www.hobartlights.com/product/html/?255.html






No.	LED	Power	Specification	Size (mm)	Size (inch)
L5-32	32 LED	64W	Amber Waring Light 14 patterns With Rear Postion Light (Red) With Left/right turn, Arrow Out ECE 65 XT2, R10 SAE J595 Class 1 8 Core cables 0.4 meter cable Side bracket + Middle bracket 5 Years warrnay 10-30V IP67 Waterproof Aluminum Alloy Housing PC lens		
L5-40	40 LED	80W		1080mm	42.5inch
L5-48	48 LED	96W		1280mm	50.4inch
L5-56	56 LED	112W		1430mm	56.3inch


Traffic Advisor
Installed at the back of the vehiclet

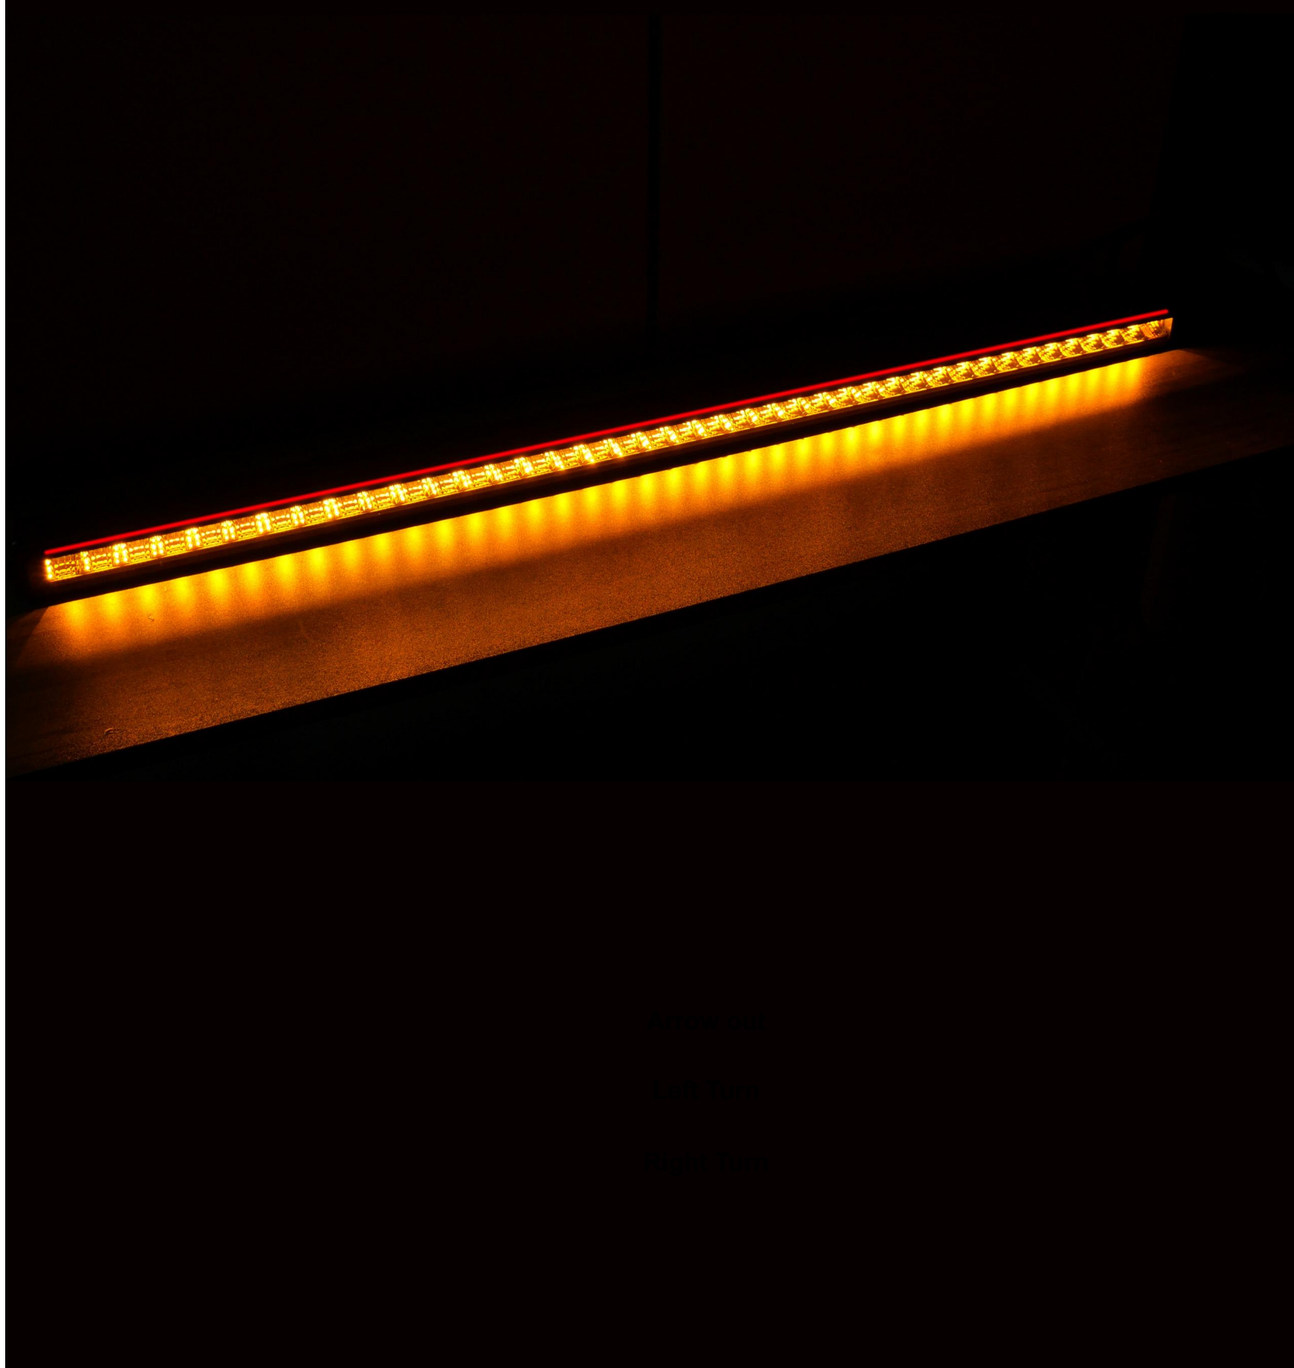

L6
Arrow Warning Light
Warning Light with Position Light

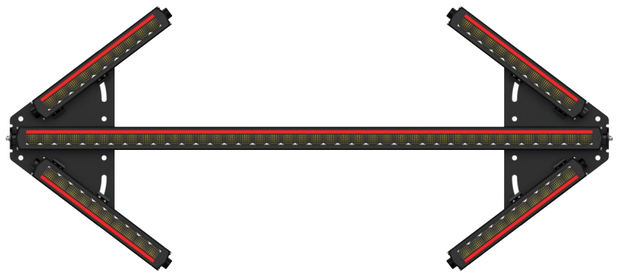

L6-40, 240W
43inch / 1080mm

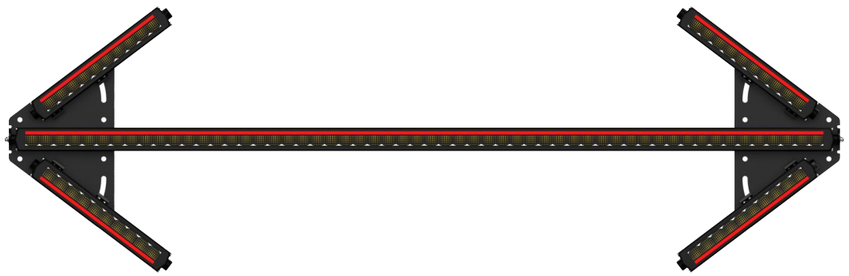

L6-56, 288W
56inch / 1430mm


Specification:

Part Number	:	L6
Item Name	:	Arrow Warning Lightbar
Size	:	43inch, 56inch
Flashing patterns	:	14 patterns
Warning Power	:	240W, 288W
Rear Position Light	:	12W, Red LED
Functions	:	Warning Light, Left/right turn, Arrow Out
ECE Approval	:	ECE 65 XT2, R10
SAE Approval	:	SAE J595 Class 1
Cable	:	8 Core cables
Cable LMength	:	1 meter cable
Mounting	:	Side bracket + Middle bracket
Warranty	:	5 Years warrnay
Voltage	:	10-30V
Waterproof	:	IP67 Waterproof
Housing Material	:	Aluminum Alloy Housing
Lens Material	:	PC lens□
Working Temp	:	-45°C ~ +65°C
Package	:	4pcs/ctn

HD pictures link:


www.hobartlights.com/product/html/?256.html

Wiring Instruciton

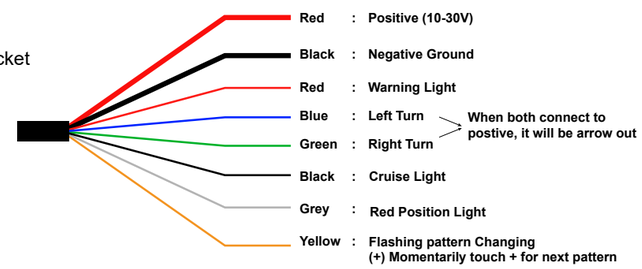



W5
Single Row LED Light Bar
Amber or White Position Light

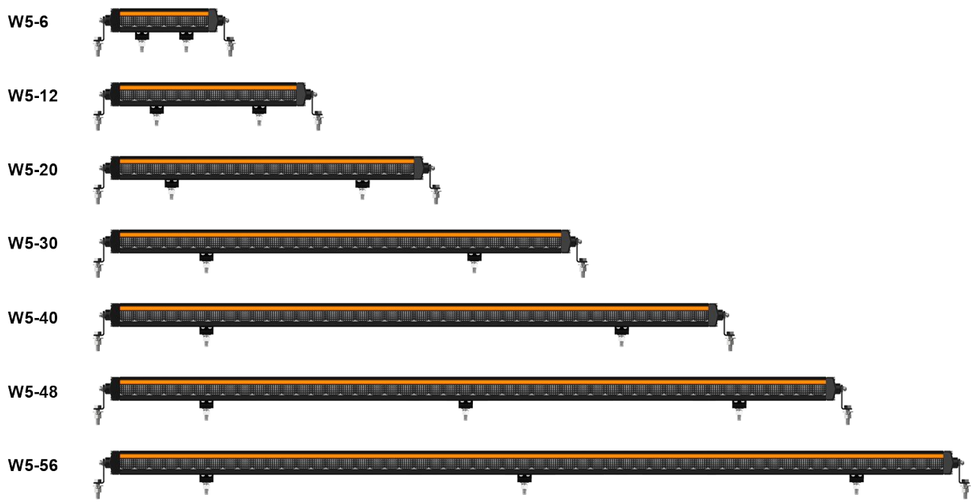


Feature:

120w	at 22''
1 Lux	at 604 Meters
40500 Lux	at 3 Meters
Chip	6W

HD pictures link:


www.hobartlights.com/product/html/?244.html





No.	LED	Power	Specification	Size(mm)	Size(inch)	Lumen
W5-6	6 LED	36w LEDs	White Driving Light with amber/white position light Spot or Flood or Mixed Side bracket + Middle bracket 5 Years warrnay 10-30V IP67 Waterproof Aluminum Alloy Housing PC lens DT connector CE,ECE R112 R10,UKCA 12pcs/ctn	200mm	7. 9inch	4320LM
W5-12	12 LED	72w LEDs		360mm	14.2inch	8640LM
W5-20	20 LED	120w LEDs		560mm	22.0inch	14400LM
W5-30	30 LED	180w LEDs		820mm	32.3inch	21600LM
W5-40	40 LED	240w LEDs		1080mm	42.5inch	28800LM
W5-48	48 LED	288w LEDs		1280mm	50.4inch	34560LM
W5-56	56 LED	336w LEDs		1430mm	56.3inch	40320LM

W7
Double Row LED Light Bar
Amber or White Position Light





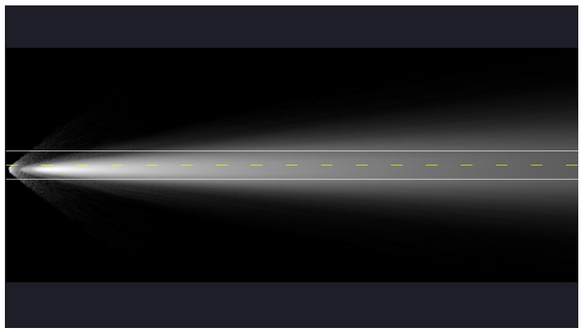

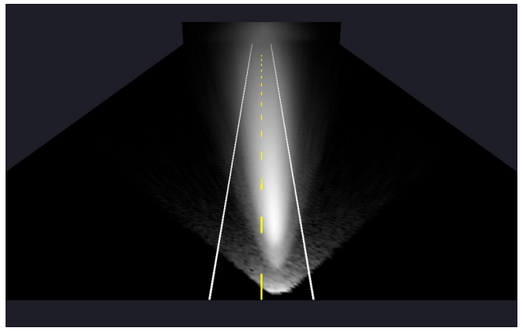

No.	LED	Power	Specification	Size (mm)	Size (inch)	Lumen
W7-20	40 LED	120W	White Driving Light with Amber / White position Light Middle bracket 5 Years warrnay 10-30V IP67 Waterproof Aluminum Alloy Housing PC lens	200mm	7.9inch	14400LM
W7-30	60 LED	180W		360mm	14.2inch	21600LM
W7-40	80 LED	240W		560mm	22.0inch	28800LM
W7-48	96 LED	288W		820mm	32.3inch	34560LM
W7-56	112 LED	336W		1080mm	42.5inch	40320LM

EXCLUSIVE
RU

Q4
30mm Safety Pole




Rubber Cab

Reflective Flag

30mm diameter PC pole

Rubber Base
with spring inside

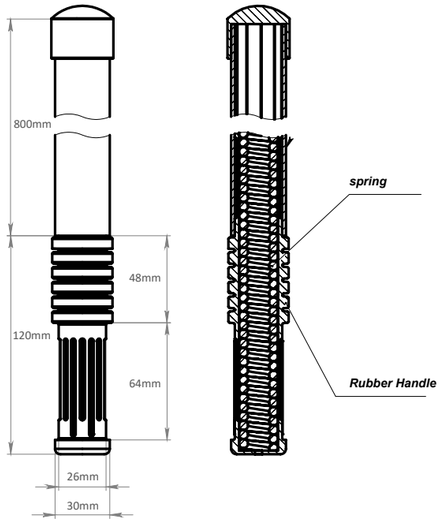

Specification:

Part Number	:	Q4
Item Name	:	Safety Pole
Length	:	920mm (3ft)
Pole diameter	:	30mm
Power	:	no lights
Pole Material	:	RAL2009, Traffic Orange PC
Housing Material	:	Rubber
Base	:	Spring base
Mounting	:	Screws mount
Waterproof	:	IP66
Warranty	:	3 Years
Working Temp	:	-50° ~ +60°
Package	:	12 pairs/ctn


HD pictures link:

www.hobartlights.com/product/html/?252.html





Q5
20mm COB Safety Whip

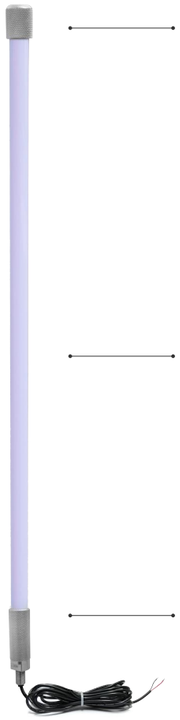

Stainless Steel Cab

20mm diameter
Corrosion-resistant materials

316 Stainless Steel Base
Anti-corrosion
Anti snow melting agent
Impact resistance



Spring base

HD pictures link:

www.hobartlights.com/product/html/?253.html

Specification:

Part Number	:	Q5
Item Name	:	COB Safety Whip Light
Length	:	1ft / 2ft / 3ft / 4ft
Pole diameter	:	20mm
Power	:	Red, Amber, Green COB
Pattern	:	Steady Burn
Voltage	:	12V-24V
Pole Material	:	PC
Housing Material	:	316 Stainless Steel Base
Base	:	Spring base
Mounting	:	Screws mount
Cable	:	1m cable
Waterproof	:	IP66
Warranty	:	5 Years
Working Temp	:	-50° ~ +60°
Package	:	12 pairs/ctn

Q6
30mm COB Safety Whip



316 Stainless Steel Cab

30mm diameter
Corrosion-resistant materials


316 Stainless Steel Base
Anti-corrosion
Anti snow melting agent
Impact resistance



Spring base

Specification:

Part Number	:	Q6
Item Name	:	COB Safety Whip Light
Length	:	1ft / 2ft / 3ft / 4ft
Pole diameter	:	30mm
Power	:	Red, Amber, Green COB
Pattern	:	Steady Burn
Voltage	:	12V-24V
Pole Material	:	PC
Housing Material	:	316 Stainless Steel Base
Base	:	Spring base
Mounting	:	Screws mount
Cable	:	1m cable
Waterproof	:	IP66
Warranty	:	5 Years
Working Temp	:	-50° ~ +60°
Package	:	12 pairs/ctn

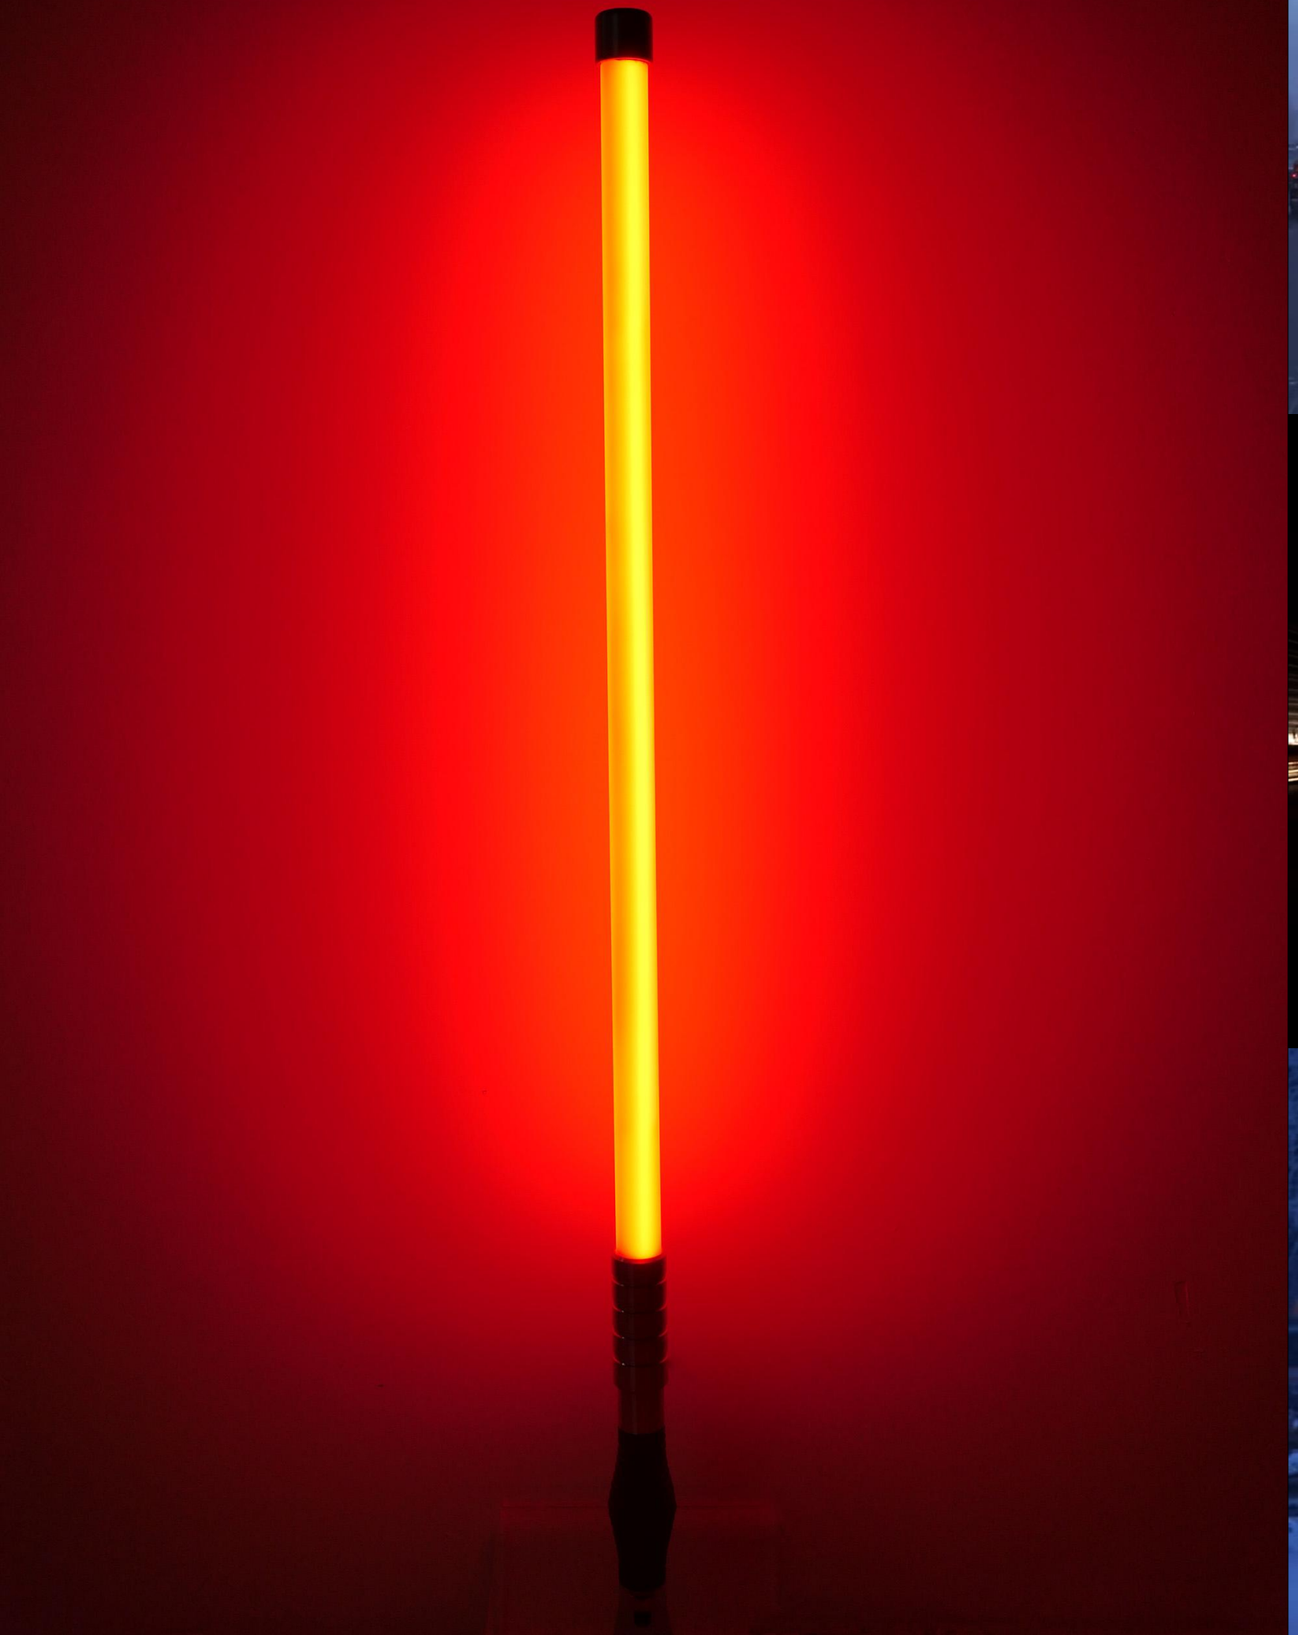


STREUDIENST
IL 717 GU






Q8
LED Safety Whip Light

EXCLUSIVE
RU



Red Flashing Light



Reflective Flag

High Strength Glass Composite Fibre
Can be spliced, 5ft + 5ft =10 ft

Shock Resistance Spring Base

Waterproof connector with cigarette plug

Specification:

Part Number	:	Q8
Item Name	:	LED Safety Whip Light
Size	:	2ft / 3ft / 4ft / 5ft/ 6ft / 8ft/ 10ft
Power	:	12pcs 0.5W RED LED
Pattern	:	Triple Flashing
Voltage	:	12V-24V
Pole Material	:	Glass composite fibre
Housing Material	:	Aluminum Alloy
Base	:	Spring base
Mounting	:	Screws mount
Cable	:	4.5m cable with cigarette plug
Waterproof	:	IP66
Warranty	:	5 Years
Working Temp	:	-50° ~ +60°
Package	:	6pcs/ctn

HD pictures link:

www.hobartlights.com/product/html/?254.html









4 COLORS IN 1



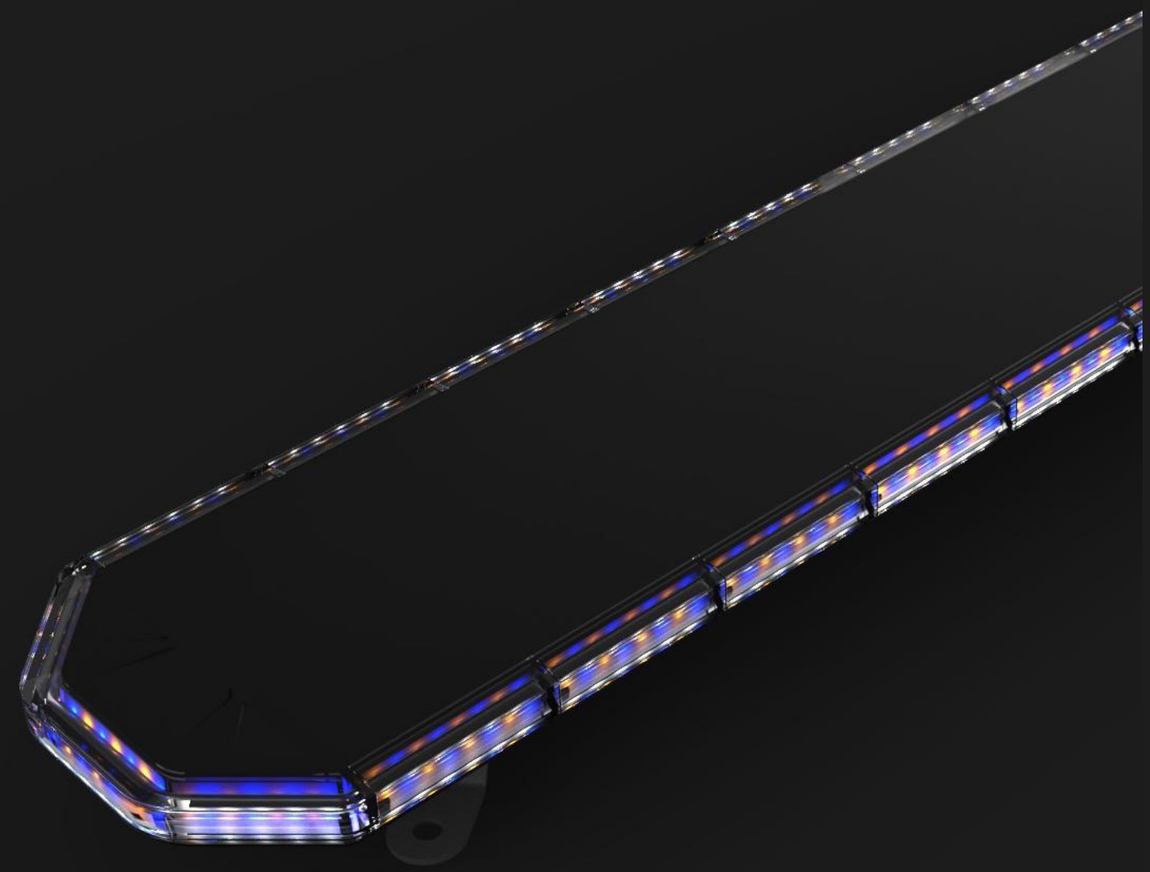

L3
LIGHTBAR
280/440/760/1080/1240/1400/1560/1720mm
11" / 17" / 30" / 43" / 49" / 55" / 62" / 68"

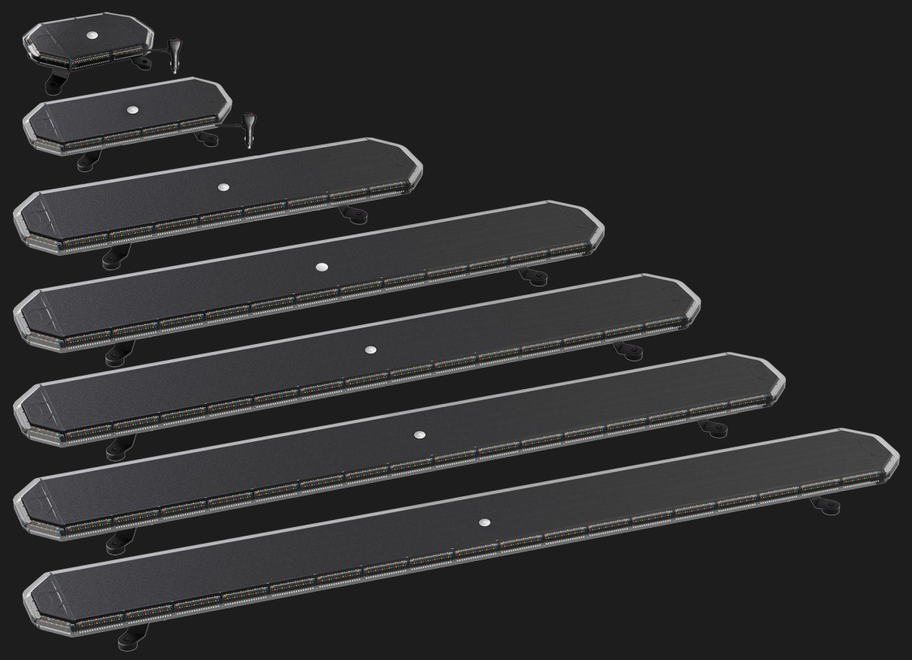


Advantages

(1) Two Levels Design		brand new design, 4 colors in one
(2) Full surround white light	:	can be used as scene light, take down, alley light
(3) Light Sensor		by day, by night, can be manually adjusted or automatically sensed
(4) R65 Class 2	:	ECE R65 Class 2
(5) SAE J845		SAE J845 Class 1 Approved
(6) Intelligent Controller	:	4-directional control, single color or dual color mix
(7) Traffic Advisor		with traffic advisor, arrow out.
(8) Maintenance	:	replaceable modules individual
(9) Waterproof		IP69K Waterproof
(10) Material	:	aluminum housing, better cooling system, PC Lens
(11) Warranty		5 Years

www.hobartlights.com/product/html/?197.html

4 Colors in 1

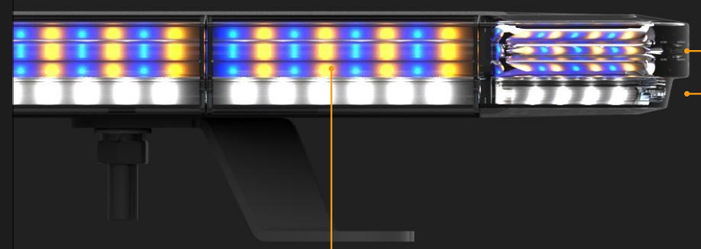


Alley Light




Single Color Version

Part Number	Modules in middle	Length in mm	Length inch	Warning Light	Scene Light Take down / Alley Light	Flashing Patterns
L3-280	2	280mm	11inch	60pcs 2W LED	50W White Beam	15 patterns
L3-440	4	440mm	17inch	84pcs 2W LED	50W White Beam	
L3-760	8	760mm	30inch	132pcs 2W LED	50W White Beam	
L3-1080	12	1080mm	43inch	180pcs 2W LED	50W White Beam	
L3-1240	14	1240mm	49inch	204pcs 2W LED	50W White Beam	
L3-1400	16	1400mm	55inch	228pcs 2W LED	50W White Beam	
L3-1560	18	1560mm	62inch	252pcs 2W LED	50W White Beam	
L3-1720	20	1720mm	68inch	276pcs 2W LED	50W White Beam	

Dual Color or Tri Color is available

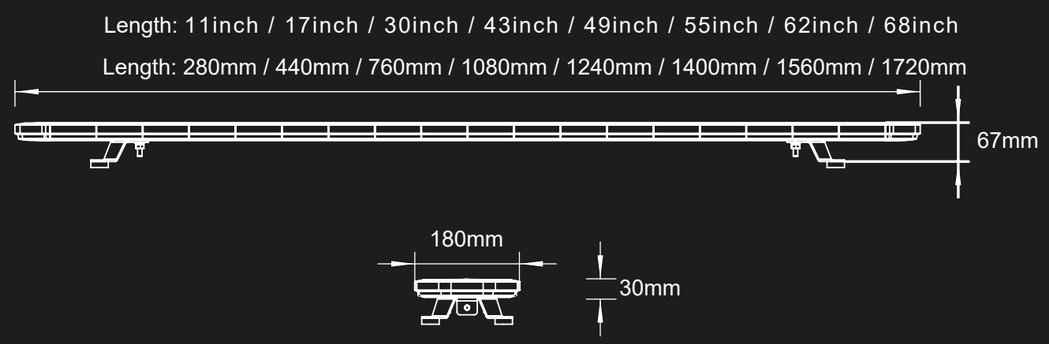

Brand New Intelligent Controller Wireless or Wired Version

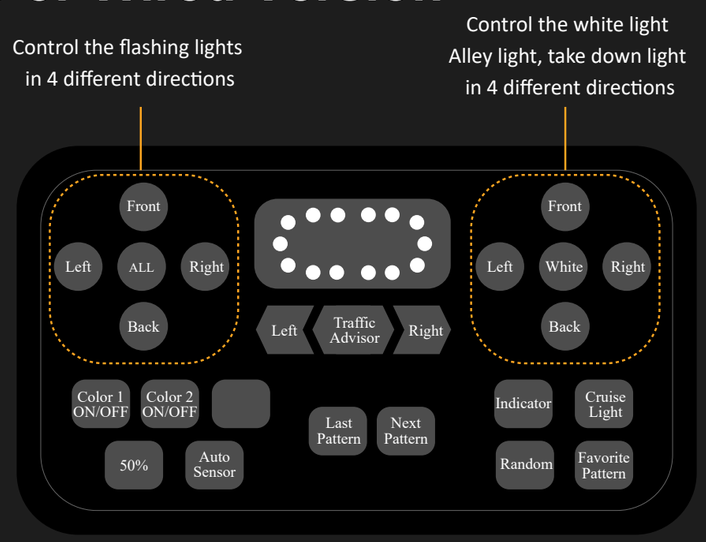


50%	Adjust brightness to 50%
Auto Sensor	Automatically senses day or night, automatically adjusts the brightness to 100% during the day and 50% at night
Indicator	Turn off screen display
Cruise Light	Keep the warning lights in steady burn mode
Random	All flashing patterns mixed together and keep changing
Favorite Pattern	You can customize your most commonly used or favorite pattern.
Left	Traffic advisor, directing vehicles to the left.
Traffic Advisor	Traffic advisor, arrow out, directing vehicles to both sides.
Right	Traffic advisor, directing vehicles to the right

L3S
Lightbar
With Signal Lights




Versions

(1) Controller Version

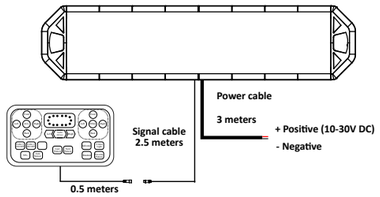


Wireless or Wired Controller

(2) Controller with extra cable Version

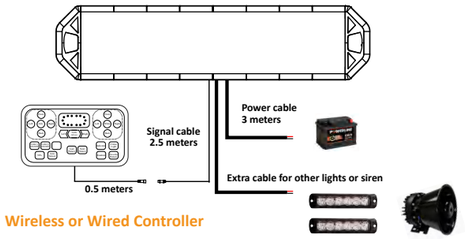


Wireless or Wired Controller


(3) Wiring Version



Positive VDC	Red	(10V - 30V DC)
Negative Ground	Black	
Mode Changing	Yellow	
Scene Light	Green	

(4) Cigarette Plug Version







When turn on – (Warning Light)
Press it once to change flashing pattern.
If the light is double warning version, press for 2 seconds to change LED Colors.

When turn on = (Scene Light),
press for 2 seconds to turn on/off auto sensor.

(5) 8 Cores Cable Version




(6) Controller with Signal Lights Version

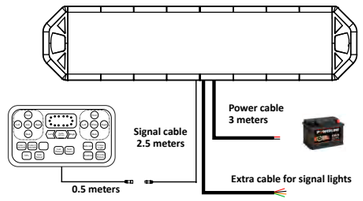


Brake Light	Red cable
Left Turn Signal Light	Yellow cable
Right Turn Signal Light	White cable
Reversing Light	Black cable

Controller



Wireless Controller
Rechargeable
15m/50ft signal range



Wired Controller
No need to charge

Logo bracket option:





Bracket options:



L3-1240 Amber Version Video Link:

https://youtu.be/5-HPOsg7IIA



Amber + Blue + Red Tri Color Video Link:

https://youtu.be/Ksx6_WJ6HvM



Vibration test Video Link:

https://youtu.be/3n-3RvA-KM8



280mm / 11inch Mini Bar



Amber version video

Blue + Red version video


https://youtu.be/pFrqCST5T6k




https://youtu.be/ms4iRtubVmo



www.hobartlights.com/product/html/?241.html



. Aluminum Alloy Material Housing, PC lens
. Frist Level: Warning Lights, 52pcs 2W LED Chip each color
. Second Level: 50W White beam for scene Light, take down, alley light.
. By day, By night function, automatically adjust brightness
. 5 Years Warranty, 10-30V
. Single color has 15 flashing patterns, Dual color has 15x3 flashing patterns
. ECE R65 Class 2, ECE R10, SAE J845 Class 1
. 3 mounting ways in 1 (Screw Mount, Bracket mount, Magnets mount)



No.	Pictures	Colors	Cable	Mounting
L3-280		Frist level: Amber Second level: White beam	40cm cable (4 cores)	**Screw Mount + Bracket Mount**
L3-280-1		Frist level: Amber Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-280aw-1		Frist level: Amber + White Strobe Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-280ab-1		Frist level: Amber + Blue Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-280rb-1		Frist level: Red + Blue Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-280arb-1		Frist level: Amber, half Red, half Blue Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug

440mm / 17’’ Mini Bar



Amber version video

Blue + Red version video


https://youtu.be/aiwqjgutoN0




https://youtu.be/vcjwy4IKbEs



www.hobartlights.com/product/html/?242.html



. Aluminum Alloy Material Housing, PC lens
. Frist Level: Warning Lights, 68pcs 2W LED Chip each color
. Second Level: 50W White beam for scene Light, take down, alley light.
. By day, By night function, automatically adjust brightness
. 5 Years Warranty, 10-30V
. Single color has 15 flashing patterns, Dual color has 15x3 flashing patterns
. ECE R65 Class 2, ECE R10, SAE J845 Class 1
. 3 mounting ways in 1 (Screw Mount, Bracket mount, Magnets mount)





No.	Pictures	Colors	Cable	Mounting
L3-440		Frist level: Amber Strobe Second level: White beam	40cm cable (4 cores)	**Screw Mount + Bracket Mount**
L3-440-1		Frist level: Amber Strobe Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-440aw-1		Frist level: Amber + White Strobe Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-440ab-1		Frist level: Amber + Blue Strobe Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-440rb-1		Frist level: Red + Blue Strobe Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug
L3-440arb-1		Frist level: Amber, half Red half Blue Second level: White beam	3 meters cable	4pcs 66mm Magnets Tri-Cigarette plug

L2 / L2-1
Screw Mount / Magnet Mount Mini Bar
With Work Light Function







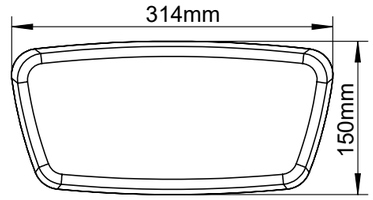


Specification:

Part No.	:	L2 / L2-1
Size	:	314x150x58mm
Warning Light Power	:	72W (48pcs 1.5W LED)
Work Light Power	:	24W (24pcs 1W LED)
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 Class 2, ECE R10
SAE Approval	:	SAE J845
Other Approval	:	CE, UKCA
Voltage	:	10-30V
Housing Material	:	ABS
Lens Material	:	UV resistant PC Lens
Lens Color	:	Amber or Clear
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

HD pictures link:

https://www.hobartlights.com

L2-4
Rechargeable Mini Bar
With Work Light Function

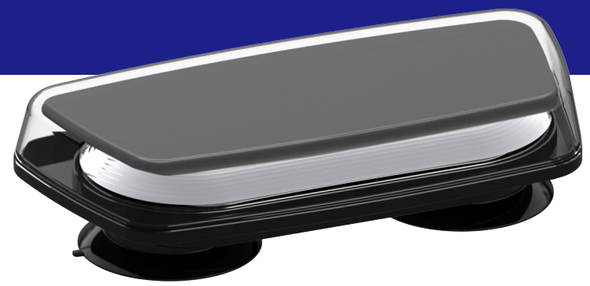





Specification:

Part No.	:	L2-4
Size	:	314x150x48mm
Warning Light Power	:	72W (48pcs 1.5W LED)
Work Light Power	:	24W (24pcs 1W LED)
Battery	:	Rechargeable Lithium Battery
Capacity	:	66.6Wh
Working hours	:	10 hours
Charging hours	:	6 hours
Waterproof	:	IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 Class 2, ECE R10
SAE Approval	:	SAE J845 Class 1
Other Approval	:	CE, UKCA
Maximum Speed Limit	:	200km/h
Voltage	:	10-30V
Housing Material	:	ABS
Lens Material	:	UV resistant PC Lens
Lens Color	:	Amber or Clear
Mounting	:	Magnetic base
Control	:	Remote
Warranty	:	3 Years
Working Temp	:	-45°C ~ +65°C

Feature:

66.6Wh	**Rechargeable Lithium battery**
200km/h	**Strong Magnetic force**
Remote	**Control**
10 hours	**working time**
Approval	**FCC / ECE**
3 Year	**Warranty**
IP66	**Waterproof**



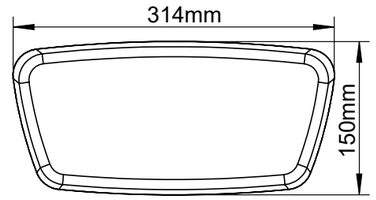

HD pictures link:

https://www.hobartlights.com

Backup Alarm Series



E301
105dB
5W



E302
107dB
14w



E305
112dB
25W



E306
112dB
25W

E301:

Part Number	:	E301
Item Name	:	Backup Alarm
Size	:	103x41x84mm
Sound Level	:	105dB
Voltage	:	12-80V
Power	:	5W
Waterproof	:	IP66
Housing Material	:	ABS Housing
Mounting	:	Screw Mount
Warranty	:	3 Years
Working Temp	:	-40°C ~ +60°C
Package	:	50pcs/ctn

E302:


Part Number	:	E302
Item Name	:	Backup Alarm
Size	:	103x43x89mm
Sound Level	:	107dB
Voltage	:	12-80V
Power	:	14W
Waterproof	:	IP66
Housing Material	:	ABS Housing
Mounting	:	Screw Mount
Warranty	:	3 Years
Working Temp	:	-40°C ~ +60°C
Package	:	50pcs/ctn


E305:


Part Number	:	E305
Item Name	:	Backup Alarm
Size	:	127x70x69.5mm
Sound Level	:	112dB
Voltage	:	12-80V
Power	:	25W
Waterproof	:	IP66
Housing Material	:	Aluminum Housing
Mounting	:	Screw Mount
Warranty	:	3 Years
Working Temp	:	-40°C ~ +60°C
Package	:	20pcs/ctn


E306:

Part Number	:	E306
Item Name	:	Backup Alarm
Size	:	146x77.5x102.2mm
Sound Level	:	112dB
Voltage	:	12-80V
Power	:	25W
Waterproof	:	IP66
Housing Material	:	Aluminum Housing
Mounting	:	Screw Mount
Warranty	:	3 Years
Working Temp	:	-40°C ~ +60°C
Package	:	20pcs/ctn









Siren and Speaker Wireless Controller



E311
Siren
200w



E308
Speaker
120dB / 100w


E311:

Part Number	:	E311
Item Name	:	Siren
Size	:	167x118x40mm
Power for Speaker	:	100W
Power for Lightbar	:	200W
Controller	:	Wireless with Speaking function
Tone	:	Dual Tone is available
Waterproof	:	IP55
Voltage	:	12-24V
Housing Material	:	Aluminium Housing
Mounting	:	Screw Mount
Warranty	:	3 Years
Working Temp	:	-40°C ~ +60°C
Package	:	10pcs/ctn

E308:

Part Number	:	E308
Item Name	:	Speaker
Size	:	144x57x140mm
Sound Level	:	120dB
Voltage	:	12-48V /12-80V
Power	:	100W
Waterproof	:	IP66
Housing Material	:	Aluminum Alloy Housing
Mounting	:	Screw Mount
Warranty	:	3 Years
Working Temp	:	-40°C ~ +60°C
Package	:	10pcs/ctn



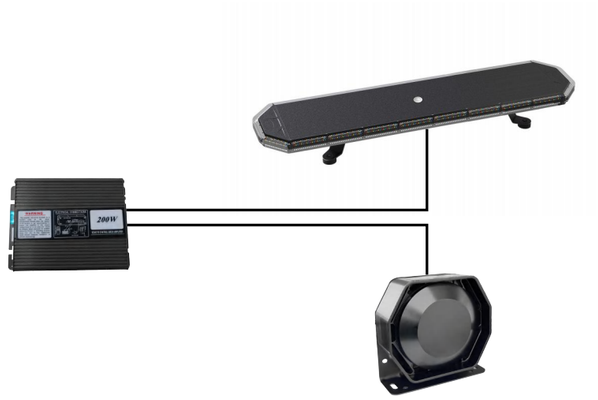

C5-B6
1200mm Roof Rack Bars
Muti-Functional



HD pictures link:

www.hobartlights.com/product/html/?199.html

Huge Range of Applicaton

the utility bar range can be customised to suit service vehicles, mining vehicles, construction and earth-moving machinery, plus contractor and tradesmen's vehicles. The bars can also be used as roof racks to carry equipment such as ladders, pipes and other materials.
Package: 1pc/ctn, 5.75kg, 1220x235x175mm



C5-280
1200mm Roof Rack Bars



HD pictures link:

www.hobartlights.com/product/html/?199.html

Huge Range of Applicaton

the utility bar range can be customised to suit service vehicles, mining vehicles, construction and earth-moving machinery, plus contractor and tradesmen's vehicles. The bars can also be used as roof racks to carry equipment such as ladders, pipes and other materials.



S1

RGBW LED Rock Lights Kit


Smokey Lens / Ultra-Wide Angle





Specification:

Part Number	:	S1
Item Name	:	RGBW Rock Lights Kit
LED	:	18pcs 5050 LED
Size	:	89x41x18mm
Kits	:	4 Pods, 6 Pods, 8 Pods, 10 Pods, 12 Pods
Lens Color	:	Smoked lens
Luminous angle	:	180 degree
Waterproof	:	IP68, IP69K
Control	:	Bluetooth APP, 3 Remotes, Sound control
Flashing patterns	:	50 Patterns
Approval	:	ECE R148 R10, CE, FCC
Voltage	:	12V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Mounting	:	Screw Mount
Cable	:	3M cable
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package		8pcs/ctn

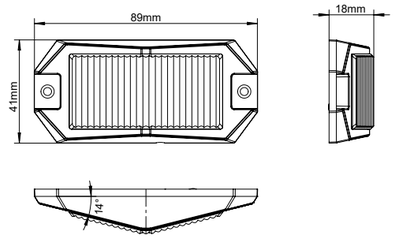

https://www.hobartlights.com/product/html/?276.html









HL-5.75 / HL-7
5.75 inch / 7 inch Headlight with DRL and DI





Specification:

Part Number	:	HL-5.75
Item Name	:	5.75 inch headlight
Functions	:	Lo-Hi beam with DRL, DI
High Beam	:	60W (2 3570 LEDs)
Low Beam	:	30W (1 3570 LED)
Daytime Runing Light	:	5W (42 LEDs)
Direction Indicator	:	5W (42 LEDs)
Lumen	:	5000lm
Waterproof	:	IP67, IP69K
Approval	:	DOT, ECE, UKCA, CE
Voltage	:	10-30V
Size	:	143x88x143mm
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Connector	:	H4 connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C


Part Number	:	HL-7
Item Name	:	7 inch headlight
Functions	:	Lo-Hi beam with DRL, DI
High Beam	:	80W (4 LEDs)
Low Beam	:	60W (3 LEDs)
Daytime Runing Light	:	5W (30 LEDs)
Direction Indicator	:	5W (30 LEDs)
Lumen	:	6000lm
Waterproof	:	IP67, IP69K
Approval	:	DOT, ECE, UKCA, CE
Voltage	:	10-30V
Size	:	174x86.7x174mm
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Connector	:	H4 connector
Warranty	:	5 Years
Working Temp		-45°C ~ +65°C


HD pictures link:

https://www.hobartlights.com/product/html/?294.html

HD pictures link:

https://hobartlights.com/product/html/?290.html




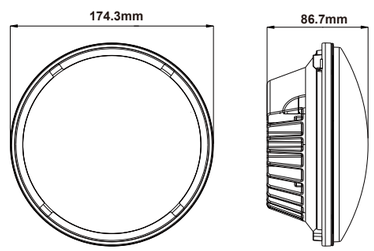





HL-4x6 / HL-5x7
4X6 & 5x7 inch Headlight with DRL

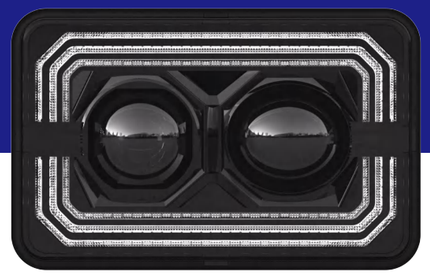




Specification:

Part Number	:	HL-4x6
Item Name	:	4x6 inch headlight
Functions	:	Lo-Hi beam with DRL
High Beam	:	60W (2 3570 LEDs)
Low Beam	:	30W (1 3570 LED)
Daytime Runing Light	:	5W White or Amber (42 LEDs)
Lumen	:	5000lm
Waterproof	:	IP67, IP69K
Approval	:	DOT, ECE, UKCA, CE
Voltage	:	10-30V
Size	:	167x84x107mm
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Connector	:	H4 connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Part Number	:	HL-5x7
Item Name	:	5x7 inch headlight
Functions	:	Lo-Hi beam with DRL
High Beam	:	60W (2 3570 LEDs)
Low Beam	:	30W (1 3570 LED)
Daytime Runing Light	:	5W White or Amber (30 LEDs)
Lumen	:	5000lm
Waterproof	:	IP67, IP69K
Approval	:	DOT, ECE, UKCA, CE
Voltage	:	10-30V
Size	:	198x85x143mm
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Connector	:	H4 connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C


HD pictures link:

https://www.hobartlights.com/product/html/?293.html

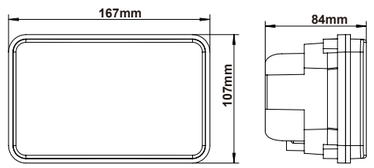

HD pictures link:

https://hobartlights.com/product/html/?291.html

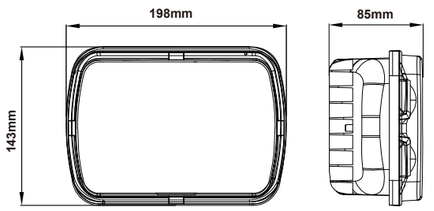

EXCLUSIVE
UK, IE

SL1-3
SCENE LIGHT



Specification:

Part Number	:	SL1-3
Item Name	:	Scene Light + Reversing Light
Size	:	236x80x37mm
Power	:	57W (38pcs 1.5W)
Raw Lumen	:	4500LM & 1800LM (dim function)
Effective Lumen	:	3030LM & 1046LM (dim function)
Scene Light Angle	:	Down 45°
Waterproof	:	IP67, IP69K
Approval	:	ECE R10, R148
Other Approval	:	CE, CA, CISPR 25 Class 4
Voltage	:	10-30V
Housing Material	:	Aluminium Housing, PC Cover
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	Rubber
Warranty	:	5 Years
Working Temp	:	-40°C ~ +65°C
Package	:	10pcs/ctn, 4.4kg, 44x27x21.5cm

www.hobartlights.com/product/html/?204.html

Certificates:

CISPR 25	**Class 4**
3030LM	**Effective Lumen**
ECE R148	**Certified**
57W	**Power**
5 Year	**Warranty**
IP69K	**Certified**


2 Functions in 1 light

Scene Light Positive	**Red**	100% brightness 4500 raw lumen
Reversing Light Positive	**Yellow**	40% brightness 1800 raw lumen
Negative Ground	**Black**	

Utility model patent certificate:
ZL202222770017.8

Appearance design patent certificate:
ZL202230609387.6

Size:



BRIGHTNESS IS MOST CRITICAL!


RAW LUMEN	4500LM
Effective Lumen	3030LM
Efficiency	123.66LM/W
Energy Efficiency Class	A+ (EU 874-2012)
Color Tempature	6216K



Scene Light
100% Brightness



Reversing Light
40% Brightness

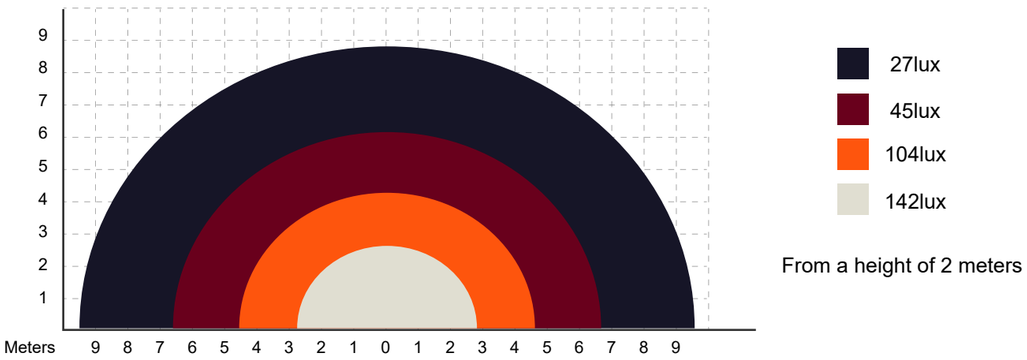

From a height of 2 meters

EXCLUSIVE
UK, IE

SL1-1
9.2’’ SCENE LIGHT WITH FLASHING LIGHT



Specification:

Part Number	:	SL1-1
Item Name	:	Scene Light with Warning Light
Size	:	236x80x37mm
Scene Light Power	:	48W (32pcs 1.5W)
Warning Light Power	:	18W (12pcs 1.5W)
Raw Lumen	:	3500LM
Effective Lumen	:	2053LM
Scene Light Angle	:	Down 45°
Warning Light angle	:	Horizontal 180°
Synchronization	:	Green wire
Asynchronous	:	White Wire
Waterproof	:	IP67, IP69K
Flashing patterns	:	13 Patterns
ECE Approval	:	ECE R65 XA XB, ECE R10, R148
Other Approval	:	CE, UKCA
Voltage	:	10-30V
Housing Material	:	Aluminium Housing, PC Cover
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	Rubber
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	10pcs/ctn, 4.4kg, 44x27x21.5cm


Utility model patent certificate:
ZL202222770017.8

Appearance design patent certificate:
ZL202230609387.6

HD pictures link:


www.hobartlights.com/product/html/?206.html

Certificates:



ECE R65	Amber XA Blue XB
ECE R148	Reverse certified
ECE R10	Certified
IP69K	Certified
5 Year	Warranty

Size:



EXCLUSIVE
UK, IE

SL1-4
SCENE LIGHT WITH TAIL POSITION, BRAKE



Specification:

Part Number	:	SL1-4
Item Name	:	Scene Light with Tail and Stop
Size	:	236x80x37mm
Scene Light Power	:	48W (32pcs 1.5W)
Tail and Stop	:	12W (12pcs 1W)
Raw Lumen	:	3500LM
Effective Lumen	:	2053LM
Scene Light Angle	:	Down 45°
Signal Light angle	:	Horizontal 180°
Waterproof	:	IP67, IP69K
ECE Approval	:	ECE R10, R148
Other Approval	:	CE, CA
Voltage	:	10-30V
Housing Material	:	Aluminium Housing, PC Cover
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	Rubber
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	10pcs/ctn, 4.4kg, 44x27x21.5cm

Utility model patent certificate:
ZL202222770017.8

Appearance design patent certificate:
ZL202230609387.6


HD pictures link:

www.hobartlights.com/product/html/?232.html

Certificates:

ECE R148	**Certified**
ECE R10	**Certified**
Mulit function	**Tail & Stop Light & Scene Light**
IP6K9K	**Certified**
5 Year	**Warranty**
Lumen	**3500lm**

Size:



EXCLUSIVE
UK, IE

SL1-2
SCENE LIGHT WITH TURN SIGNAL



Specification:

Part Number	:	SL1-2
Item Name	:	Scene Light with Turn Signal
Size	:	236x80x37mm
Scene Light Power	:	48W (32pcs 1.5W)
Signal Light Power	:	18W (12pcs 1.5W)
Raw Lumen	:	3500LM
Effective Lumen	:	2053LM
Scene Light Angle	:	Down 45°
Signal Light angle	:	Horizontal 180°
Waterproof	:	IP67, IP69K
ECE Approval	:	ECE R10, R148
Other Approval	:	CE, CA
Voltage	:	10-30V
Housing Material	:	Aluminium Housing, PC Cover
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	0.3M cable
Gasket	:	Rubber
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	10pcs/ctn, 4.4kg, 44x27x21.5cm

Utility model patent certificate:
ZL202222770017.8

Appearance design patent certificate:
ZL202230609387.6


HD pictures link:

www.hobartlights.com/product/html/?190.html

Certificates:

ECE R148	Certified
ECE R10	Certified
Mulit function	Turn signal Light & Scene Light
IP6K9K	Certified
5 Year	Warranty
Lumen	3500lm

Size:



Auxiliary Turn Signal



When turning left
All lights on the left will turn on simultaneously with the left turn signal

When turning Right
All lights on the right will turn on simultaneously with the right turn signal



Loding & Unloading
At any time any where!

Let our worker working under the light
Safer and more efficient





Wide Range of Applications

Bus, RV, engineering vehicle, commercial vehicle, agricultural vehicle, offroad, heavy duty...



EXCLUSIVE
UK, IE, FI

SL5
4.6’’ MINI SCENE LIGHT

4.6’’ Mini Version





Specification:


Part Number	:	SL5
Item Name	:	Mini Version Scene Light
Size	:	118x40x24mm
Scene Light Power	:	20W
Raw Lumen	:	1800LM & 900LM (dim function)
Effective Lumen	:	1080LM & 532LM (dim function)
Scene Light Angle	:	Down 45°
Warning Light angle	:	Horizontal 180°
Waterproof	:	IP67, IP69K
Approval	:	ECE R10, CE, UKCA
Voltage	:	10-30V
Housing Material	:	Aluminium Housing, PC Cover
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screw Mount
Cable	:	40cm 3cores cable
Gasket	:	Rubber
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	100pcs/ctn, 12.5kg, 53x28x28cm



HD pictures link:

www.hobartlights.com/product/html/?239.html

Size:

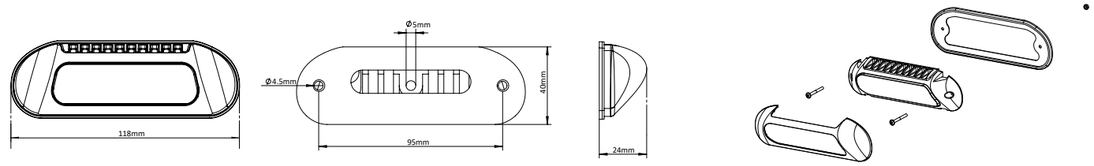

SL6
9.2’’ RECHARGEABLE SCENE LIGHT




Specification:

Part Number	:	SL6
Item Name	:	Rechargeable Scene Light
Size	:	226x66x70mm
Scene Light Power	:	20W
Warning Light Power	:	18W
Raw Lumen	:	1800LM
Working Hours	:	8 hours
Battery	:	8000mAh (2pcs 3.7V 4000mAh)
Scene Light Angle	:	Down 45°
Warning Light angle	:	Horizontal 180°
Waterproof	:	IP66
Flashing patterns	:	11 Patterns
Approval	:	R65 R10, R148, CE, UKCA
Voltage	:	10-30V
Housing Material	:	Aluminium Housing, PC Cover
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	2 magnets
Warranty	:	3 Years
Working Temp	:	-45°C ~ +65°C

www.hobartlights.com/product/html/?240.html

Feature:




8000mAh Battery

8 Hours Working Time

Magnetic Mounting



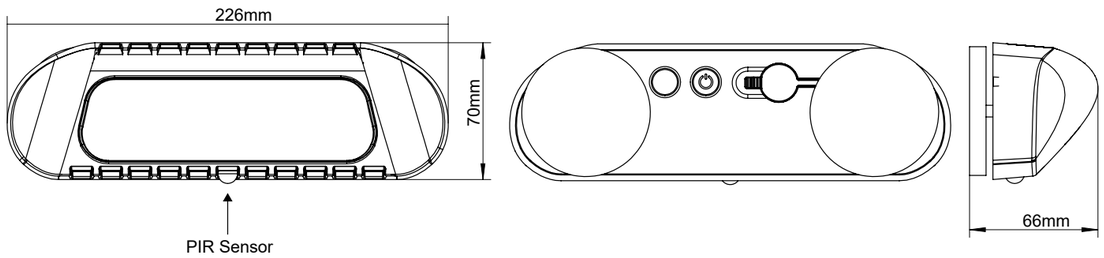

H5
Zone Light

EXCLUSIVE
UK, IE







Specification:

Part Number	:	H5
Item Name	:	Zone Light
Size	:	104x40x18mm
Power	:	9W
Lumen	:	500LM
LED	:	18pcs 0.5W
Switch	:	Mechanical switch
Waterproof	:	IP66
Approval	:	ECE R10, UKCA, CE
Voltage	:	12-24V
Housing Material	:	Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	White
Mounting	:	Screw Mount
Cable	:	250mm two wires
Gasket	:	Silicone
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	16.7kg, 160pcs/ctn
Carton size	:	56x27x35cm

Size:

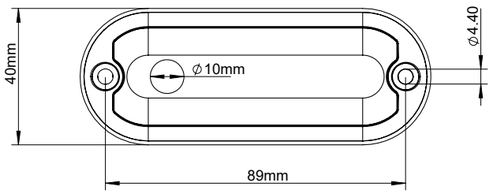



HD pictures link:

www.hobartlights.com/product/html/?250.html

EXCLUSIVE
RU

Mini LED Work Lights Series
100° Wide Flood Beam



WL64-4R
3inch 28W
2800LM



WL64-4S
3inch 28W
2800LM





WL64-6
4inch 42W
3360LM

www.hobartlights.com/product/html/?245.html
www.hobartlights.com/product/html/?234.html
www.hobartlights.com/product/html/?238.html


Specification:

Part	:	WL64 mini work Light series
Waterproof	:	IP67, IP69K
Beam	:	100° x 80° Wide Flood Beam
Approval	:	ECE R10, SAE
Other Approval	:	CE, CISPR 25 Class 3
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Bracket Mounting
Connector	:	Bulid-in Connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	24pcs/ctn
Carton Size	:	380x340x315mm
Weight	:	10.1kg/9.8kg/11.8kg

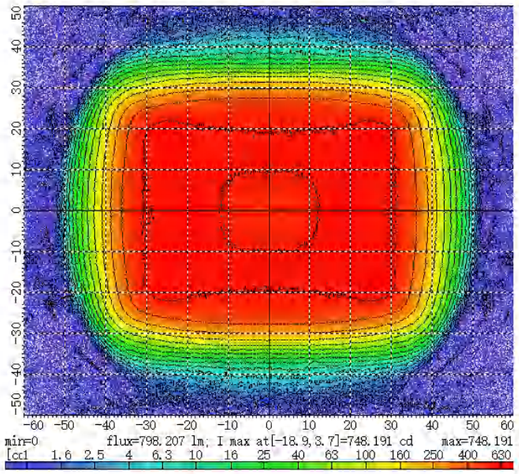


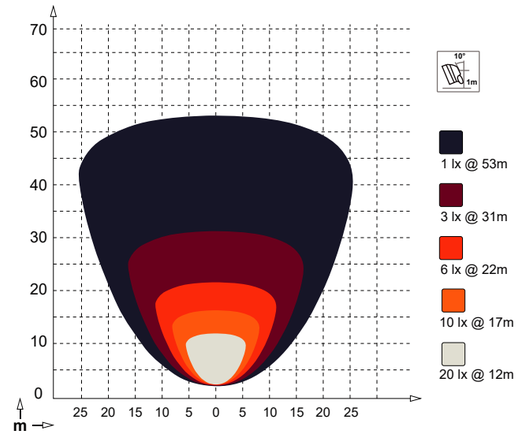


WL64-4S: 10 meter @ 28lux
WL64-4R: 10 meter @ 28lux

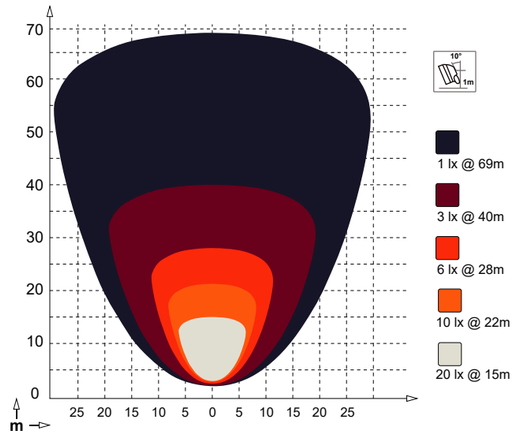

WL64-6: 10 meter@ 47lux

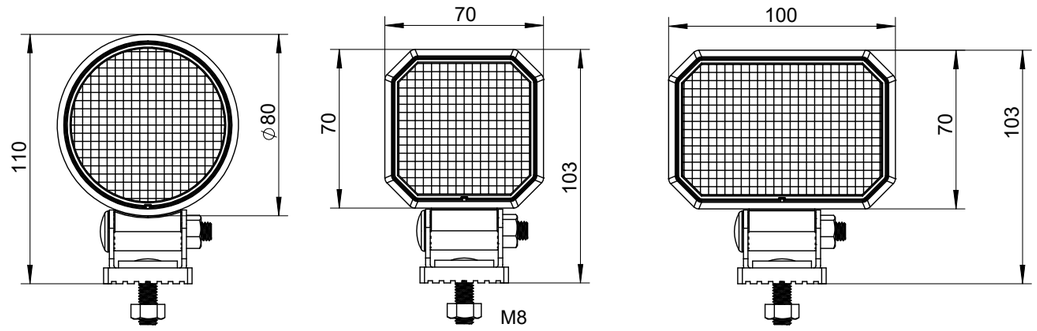

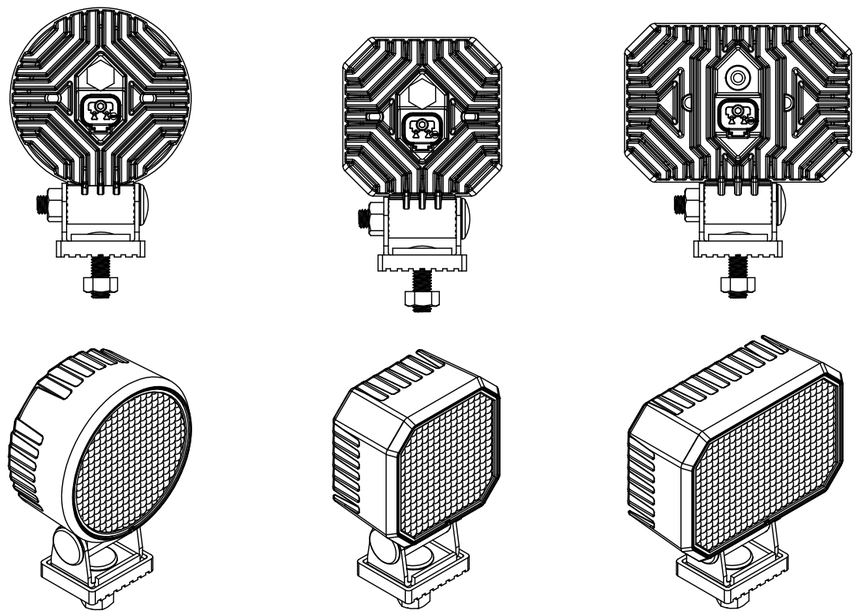

LED Work Lights
Thermal Control System




WL64-9
4.2”, 63W
5040LM




WL64-16
4.3inch 112W
8960LM


Specification:


Part No.	:	WL64-9 / WL64-16
Power	:	63W / 112W
Lumen	:	5040LM / 8960LM
Thermal Control	:	Thermal Control System
Waterproof	:	IP67, IP69K
Beam	:	Flood Beam
Approval	:	ECE R10, CE
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Screws
Connector	:	Bulid-in DT Connector
Warranty	:	5 Years
Working Temp		-45°C ~ +65°C
Package		20pcs/ctn

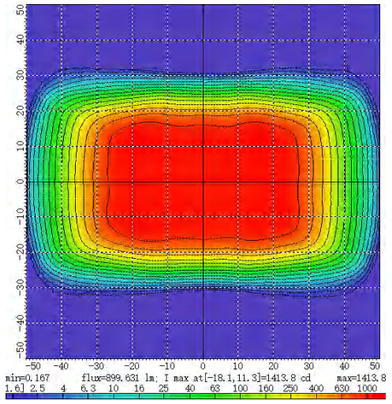


https://hobartlights.com/product/html/?263.html
https://hobartlights.com/product/html/?264.html










LED Work Lights
100° Wide Flood Beam, not glaring Lightbeam




WL64-15
6inch 105W
8400LM

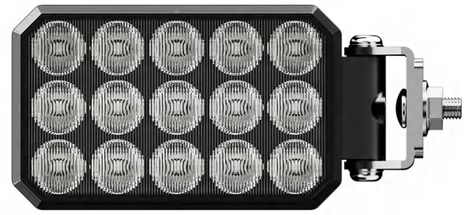


Specification:


Part No.	:	WL64-15
Real Power	:	105W
Current	:	12V@4.58A, 24V@2.3A
Waterproof	:	IP67, IP69K
Beam	:	100°x50° Wide Flood Beam
Approval	:	ECE R10, SAE
Other Approval	:	CE, CISPR 25 Class 3
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Vertical or Horizontal
Connector	:	Bulid-in Connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	18kg, 20pcs/ctn, 460x250x390mm

not glaring Lightbeam

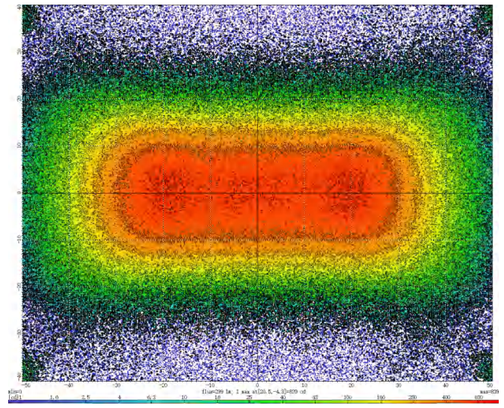


www.hobartlights.com/product/html/?237.html






Vertical installation



Horizontal installation



Flush Mount Work Lights
WL66



WL66-2
4.3inch / 20W
1800LM




WL66-4
6.7inch / 40W
3600LM


Specification:


Part	:	WL66-2
Power	:	20W
Theoretical lumen	:	1800LM
Size	:	110x59x56mm
Waterproof	:	IP67, IP69K
Beam	:	Flood Beam
Approval	:	ECE R10
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Flush Mounting
Connector	:	pig tial or DT connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	17.2kg, 50pcs/ctn
Carton Size	:	43x28.5x43.5mm


Specification:

Part	:	WL66-4
Power	:	40W
Theoretical lumen	:	3600LM
Size	:	170x59x56mm
Waterproof	:	IP67, IP69K
Beam	:	Flood Beam
Approval	:	ECE R10
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Flush Mounting
Connector	:	pig tial or DT connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	13.7kg, 24pcs/ctn
Carton Size	:	40.5x34.5x26.6mm







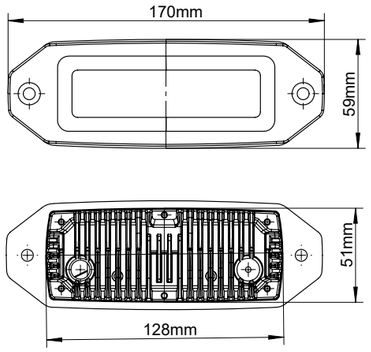

Bracket Mount Work Lights
WL67



WL67-2
3inch / 20W
1800LM




WL67-4
5inch / 40W
3600LM


Specification:


Part	:	WL67-2
Power	:	20W
Theoretical lumen	:	1800LM
Size	:	73x45x54mm
Waterproof	:	IP67, IP69K
Beam	:	Flood Beam
Approval	:	ECE R10
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Bracket Mounting
Connector	:	pig tial or DT connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	50pcs/ctn
Carton Size	:	43x28.5x43.5mm

Specification:

Part	:	WL67-4
Power	:	40W
Theoretical lumen	:	3600LM
Size	:	127x45x54mm
Waterproof	:	IP67, IP69K
Beam	:	Flood Beam
Approval	:	ECE R10
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Clear
Mounting	:	Bracket Mounting
Connector	:	pig tial or DT connector
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	24pcs/ctn
Carton Size	:	40.5x34.5x26.6mm





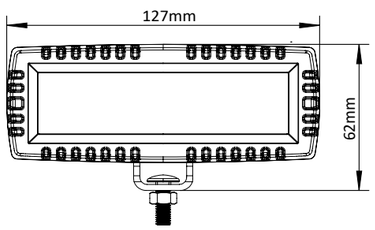

EXCLUSIVE
CA, US, UK, IE

T1
Wireless Multi Functional Tail Light




Specification:

Part No.	:	T1
Item Name	:	Wireless Tail Light
Size	:	165X100X39.5mm
Function	:	Tail, License plate light, Brake,
	:	Reversing, DI, Reflector
Charging hours	:	6 Hours
Standby	:	2 Hours
Battery Capacity	:	5000mAh x 2
Frequency	:	2.4G
Signal strength	:	30 meters / 98ft
Approval	:	ECE R148 R10, FCC, CE, UKCA
Canbus Controller	:	Available
Housing material	:	PC
Connector	:	EUROPE 7pin
Voltage	:	12V or 24V or 12-24V
Canbus	:	With or without Canbus function
Waterproof	:	IP68, IP69K
Working Temp	:	-40° to +60°
Warranty	:	3 year
Mounting	:	horizontal and vertical
Magnets	:	2 x6pcs Super strong Magnets
Package	:	5 sets/ctn


Features:

FUNCTION		WORKING HOURS
Tail light + license plate light	:	25 hours
Brake light	:	17 hours
Turn Signal	:	58 hours
Reversing Light	:	48 hours




HD pictures link:

www.hobartlights.com/product/html/?198.html



Horizontal magnetic mounting



Vertical magnetic mounting

Transmitter



7 pin EU transmitter



7 pin AU transmitter



6 Blade US transmitter



7 pin US transmitter



4 pin US transmitter


Magnetic charging port
Fully waterproof design (IP68, IP69K)





IP68 Waterproof video
https://youtu.be/3EklUfdWvZ4



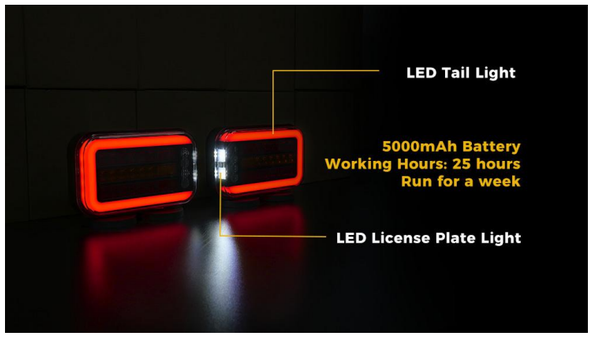







T9
Wireless Trailer Lighting Boards




Specification:

Part No.	:	T9
Item Name	:	Wireless Trailer Lighting Boards
Function	:	Tail, License plate light, Brake,
	:	Fog Light, DI, Reflector
Charging hours	:	6 Hours
Standby	:	2 Hours
Battery Capacity	:	5000mAh x 2
Frequency	:	2.4G
Signal strength	:	30 meters / 98ft
Approval	:	ECE R148 R10, FCC, CE, UKCA
board material	:	3mm thickness Aluminum
board size	:	1200x140x3mm
Connector	:	EUROPE 7pin / USA 7 pin
Voltage	:	12-24V
Canbus	:	with or without Canbus function
Waterproof	:	IP68, IP69K
Working Temp	:	-30° to +60°
Warranty	:	3 year
Mounting	:	Screws or springs

Features:

FUNCTION		WORKING HOURS
Tail light + license plate light	:	**25 hours**
Brake light	:	**17 hours**
Turn Signal	:	**58 hours**
Fog Light	:	**10 hours**





7 PIN EU transmitter



6 Blade transmitter



7 PIN USA transmitter



4 PIN transmitter





EXCLUSIVE CA

T6
Wireless Multi Functional Tail Light



Specification:


Part No.	:	T6
Item Name	:	Wireless Tail Light
Size	:	110x103x65mm
Function	:	Tail, License plate light, Brake, DI
Charging hours	:	5 Hours
Standby	:	4 Hours
Battery Capacity	:	2500mAh, 3.7V, 9.25Wh
Mounting	:	horizontal and vertical
Frequency	:	2.4G
Signal strength	:	30 meters / 98ft
Approval	:	FCC, CE, UKCA
Housing material	:	PC
Connector	:	6 Blade or 7 pin or 4 pin
Voltage	:	12V or 24V or 12-24V
Canbus	:	With or without canbus function
Waterproof	:	IP65
Working Temp	:	-40° to +60°
Warranty	:	3 year
Magnets	:	Super strong Magnets


Features:

FUNCTION		WORKING HOURS
Tail Light + License Plate Light	:	**11 hours**
Brake Light	:	**6.5 hours**
Turn Signal	:	**8 hours**

HD pictures link:

www.hobartlights.com/product/html/?226.html







7 PIN EU transmitter



6 Blade transmitter



7 PIN USA transmitter



4 PIN transmitter

T1-C (cable version)
LED Multi Functional Tail Light




Specification:

Part No.	:	T1-C
Item Name	:	LED Tail Light
Size	:	165X100X39.5mm
Function	:	Tail, License plate light, Brake,
	:	Reversing, DI, Reflector
Approval	:	ECE R148 R10, CE, UKCA
Housing material	:	PC
Cable	:	35cm
Connector	:	pig tail
Voltage	:	12-24V
Waterproof	:	IP66
Working Temp	:	-40° to +60°
Warranty	:	5 year
Mounting	:	Screw Mount
Package	:	8 pairs/ctn, 5.8kg, 37.5x28.5x289cm

Features:

Rear Position Light, Liscense Plate Light	Red Cable
Brake	Green Cable
Direction Indicator	Yellow Cable
Reversing	Black Cable
Negative Ground	White Cable

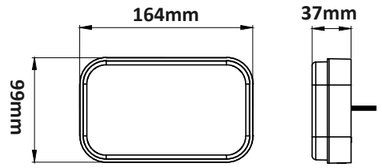

T15
LED Side Marker Light



Specification:

Part No.	:	T15
Item Name	:	LED Side Marker Light
Size	:	89x41x18mm
Approval	:	ECE R148 R10, CE, UKCA
Housing material	:	PC
Cable	:	35cm
Connector	:	pig tail
Voltage	:	12V
Waterproof	:	IP67
Working Temp	:	-40° to +60°
Warranty	:	5 year
Mounting	:	Screw Mount

T8
LED Multi Functional Tail Light



Specification:

Part No.	:	T8
Item Name	:	LED Tail Light
Size	:	146X28X171mm
Function	:	Tail, Brake, Reversing, DI, Reflector
	:	Warning Light
Approval	:	ECE R148 R10, DOT
Housing material	:	ABS housing, PC lens
Cable	:	35cm
Connector	:	pig tail
Voltage	:	12-24V
Waterproof	:	IP68
Working Temp	:	-40° to +60°
Warranty	:	5 year
Mounting	:	Screw Mount
Package	:	20 pcs/ctn


Features:

Brake Light	**Red wire**	**(+)**
Position Light	**Orange wire**	**(+)**
Reversing Light	**White wire**	**(+)**
Flash Light	**Yellow wire**	**(+)**
Flash Pattern and SYNC	**Green wire**	**(+)**
Negative Ground	**Black wire**	**(-)**

* For North America, please use the red brake light as turn signal light;
For Europe or other area, please use the amber flash light light as turn signal light;

HD pictures link:

www.hobartlights.com/product/html/?257.html

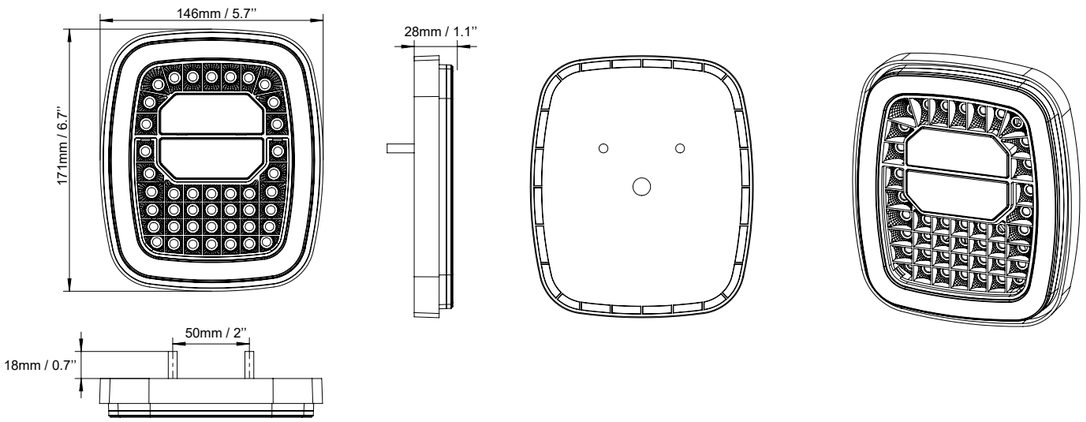

New Release in 2026 Oct



B11, B12, B13 (Screw Mount)
B11-1, B12-1, B13-1 (Magnet Mount)
Amber lens / Clear Lens



B11
32W
16LEDs
146x146x75mm

B12
48W
32 LEDs
146x146x102mm

B13
48W
48LEDs
146x146x129mm

Specification:


Part No.	:	B11 / B12 / B13
Waterproof	:	IP69K
Flashing patterns	:	10 Patterns
ECE Approval	:	ECE R65 Class 1 R10
SAE Approval	:	SAE J845 class 1
Other Approval	:	CE
Voltage	:	10-30V
Housing Material	:	ABS housing
Lens	:	Replaceable PC Lens
Reflector	:	Reflector on the top
Color option	:	Amber, Blue, Red, Green
Mounting	:	Bolt Mount / Magnet Mount
Cable	:	0.4M / 3M cable
Control	:	Switch
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Certificates:

Colors	
Lens	Replaceable Lens
ECE R65	Class 1
ECE R10	Approved
SAE J845	Class 1
5 Year	Warranty
IP69K	Protection

HD pictures link:

https://hobartlights.com/product/html/?278.html

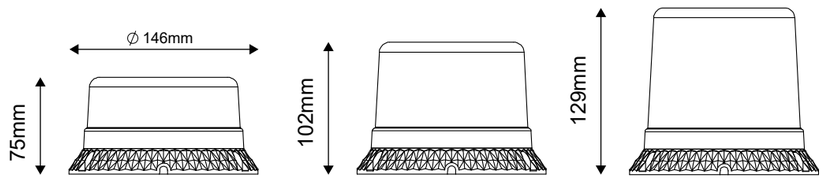

B11-2, B12-2, B13-2
DIN Mount



B11-2
32W
16LEDs
124x124x159mm

B12-2
48W
32 LEDs
124x124x186mm

B13-2
48W
48LEDs
124x124x213mm

Specification:


Part No.	:	B11-2 / B12-2 / B13-2
Waterproof	:	IP69K
Flashing patterns	:	10 Patterns
ECE Approval	:	ECE R65 Class 1 R10
SAE Approval	:	SAE J845 class 1
Other Approval	:	CE
Voltage	:	10-30V
Housing Material	:	ABS housing
Lens	:	Replaceable PC Lens
Reflector	:	Reflector on the top
Color option	:	Amber, Blue, Red, Green
Mounting	:	DIN mount
Cable	:	no available
Control	:	Switch
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Certificates:

Colors	
Lens	Replaceable Lens
ECE R65	Class 1
ECE R10	Approved
SAE J845	Class 1
5 Year	Warranty
IP69K	Protection

HD pictures link:

https://hobartlights.com/product/html/?279.html

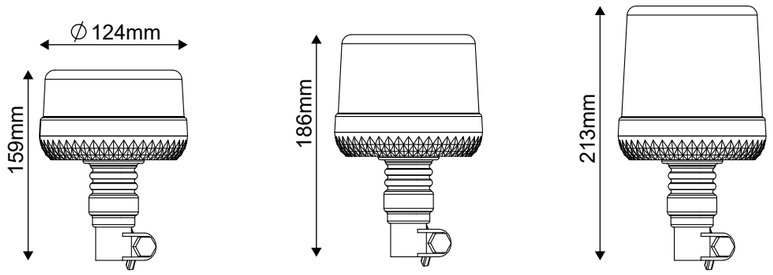

B11-3, B12-3, B13-3
Single Bolt Mount




B11-3
32W
16LEDs
124x124x91mm

B12-3
48W
32 LEDs
124x124x118mm

B13-3
48W
48LEDs
124x124x145mm


Specification:

Part No.	:	B11-3 / B12-3 / B13-3
Waterproof	:	IP69K
Flashing patterns	:	10 Patterns
ECE Approval	:	ECE R65 Class 1 R10
SAE Approval	:	SAE J845 class 1
Other Approval	:	CE
Voltage	:	10-30V
Housing Material	:	ABS housing
Lens	:	Replaceable PC Lens
Reflector	:	Reflector on the top
Color option	:	Amber, Blue, Red, Green
Mounting	:	Single Bolt Mount
Cable	:	0.4M cable
Control	:	Switch
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

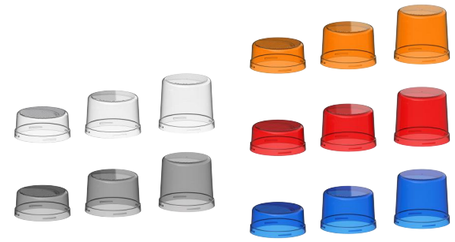


HD pictures link:

https://hobartlights.com/product/html/?280.html

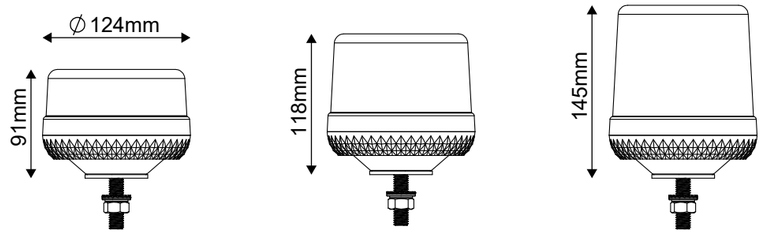

Bigger, Taller Stronger

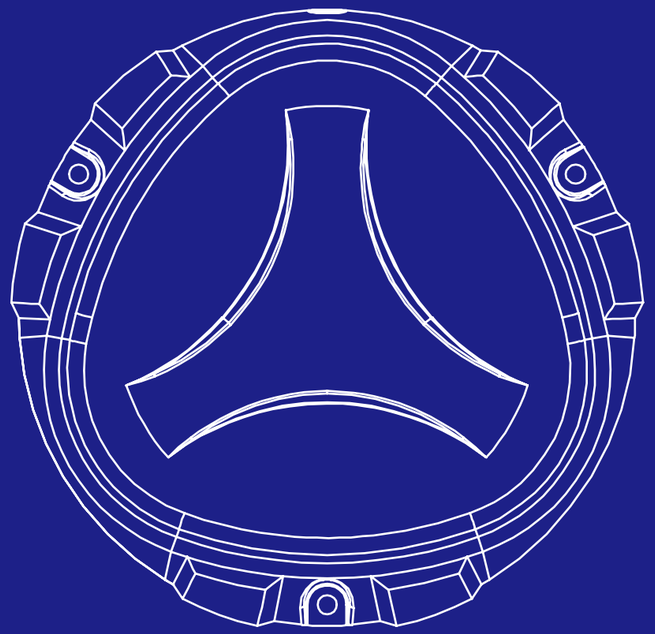

B8, B9, B10
6.5 Inch Big Size Beacon
103mm / 147mm / 191mm tall



B8
48W
16 LEDs
164x160x103mm



B9
96W
32 LEDs
164x160x147mm



B10
144W
48 LEDs
164x160x191mm

Specification:

Part No.	:	B8 / B9 / B10
Waterproof	:	IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 Class 2 R10
SAE Approval	:	SAE J845 class 1
Other Approval	:	CE
SYNC & Alternatly	:	Available
Voltage	:	10-30V
Housing Material	:	Aluminun Alloy housing
Lens	:	PC Lens
Color option	:	Amber, Blue, Red, Green
Mounting	:	Bolt Mount / Magnet Mount
Cable	:	0.4M / 3M cable
Control	:	Cable
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Certificates:

Colors	
60G	Anti-Shock Rating
ECE R65	Class 1
ECE R10	Approved
SAE J845	Class 1
5 Year	Warranty
IP69K	Protection

HD pictures link:

https://hobartlights.com

B5-4
RECHARGEABLE BEACON





Specification:


Part No.	:	B5-4
Size	:	109x109x87mm
Power	:	36W LED Chip
Battery	:	Rechargeable Lithium Battery
Capacity	:	7.4V, 4000mAh 28.8Wh
Working hours	:	10 hours
Charging hours	:	6 hours
Light source	:	24pcs 1.5W LED
Waterproof	:	IP66
Flashing patterns	:	10 Patterns
Approval	:	ECE R65 R10, SAE, CE
Maximum speed limit	:	200km/h
Voltage	:	10-30V
Housing Material	:	Aluminum, PC
Mounting	:	32KG Magnetic pull force base
Control	:	Remote
Warranty	:	3 Years
Working Temp	:	-45°C ~ +65°C


Certificates:

4000mAh	**Rechargeable Lithium battery**
200km/h	**Strong Magnetic force**
Remote	**Control**
10 hours	**working time**
Approval	**FCC / ECE**
3 Year	**Warranty**
IP66	**Waterproof**

HD pictures link:

www.hobartlights.com/product/html/?243.html





EXCLUSIVE
RU, FI

B5 / B5-1
LOW PROFILE BEACON



Screw Mount
0.4m cable
Lead wire



Magnet Mount
3m cable
Double switch cigarette lighter

Specification:

Part No.	:	B5 / B5-1
Size	:	111x111x54.6mm
Power	:	36W LED Chip
Light source	:	24pcs 1.5W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R65, ECE R10
SAE Approval	:	SAE J845
Other Approval	:	CE
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Amber or Clear
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	12pcs/ctn, 5.8kg, 28.5x28.5x27.5cm (B5) 12pcs/ctn, 9.1kg, 36.5x34.5x27.5 cm (B5-1)

Certificates:


Patent No.	ZL 2022 3 0666681.0
60G	Anti-Shock Rating
ECE R65	Class 1
ECE R10	Approved
SAE J845	Class 1
5 Year	Warranty
IP69K	Protection


HD pictures link:


www.hobartlights.com/product/html/?192.html

www.hobartlights.com/product/html/?200.html

Size:







EXCLUSIVE
RU, FI

B6 / B6-1
HEAVY DUTY BEACON



Screw Mount
0.4m cable
Lead wire



Magnet Mount
3m cable
Double switch cigarette lighter

Specification:


Part No.	:	B6 / B6-1
Size	:	124x124x89mm
Power	:	48W LED Chip
Light source	:	48pcs 1W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R65 Amber Class 2, ECE R10
SAE Approval	:	SAE J845
Other Approval	:	CE, CISPR 25 Class 5
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Amber or Clear
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	8pcs/ctn, 6.1kg, 38x38x27cm (B6) 8pcs/ctn, 7.96kg, 38x38x27cm (B6-1)


Certificates:


Patent No.	ZL202230665987.4
CISPR 25	Class 5
ECE R65	Class 2
60G	Anti-Shock Rating
SAE J845	Class 1
5 Year	Warranty
IP69K	Protection

HD pictures link:

- www.hobartlights.com/product/html/?193.html
- www.hobartlights.com/product/html/?207.html








SC-4.5
vacuum mount





Innovative Technology
Strong like Bull

Innovative vacuum mount technology seamlessly attaches racks to cars and marine accessories to boats and more without the worry of scratching surfaces or drilling holes. Incredibly strong, versatile and easy to use.

Magnets cannot attract aluminum alloy, Carbon fiber roof, glass surface and metal surface, this where the vacuum mounts are needed.

You can take your adventures anywhere with any type of vehicle

Where are vacuum mounts applied?


- Glass surface
- Plastic surface
- Aluminum alloy roof
- Carbon fiber roof
- Car or boat surface

How strong are the vacuum mounts?

4.5” vacuum mounts have a rated pull strength of 324kg, pulling straight out from center. Pull strength on a shear load, i.e. pulling from the side, will be less.

How long do the vacuum mounts last?

There’s no set time limit on our vacuum mounts. It depends in part on the surface you attach to, the condition of the vacuum mount, the load you put on it, and other factors. As for surfaces to attach to, vacuum mounts in general were designed to carry big sheets of glass and other solid surface materials, so smoother, flatter surfaces are ideal. Clean surfaces and clean suckers go a long way to maximizing the hold time. In any event, if the vacuum mount begins to lose some vacuum, **it will warn you** so you can get it back to full power before it comes off. The vacuum pump’s plunger will extend from the pump cylinder when it starts to lose power, revealing an orange indicator band. Once you see orange, that’s your cue to repump your sucker.



Warning line
During use, ensure that this red line is inside and not visible.



EXCLUSIVE
RU, FI

B7 / B7-1
HIGH PROFILE BEACON (2 LAYERS)



Screw Mount
0.4m cable
Lead wire



Magnet Mount
3m cable
Double switch cigarette lighter

Specification:


Part No.	:	B7 / B7-1
Size	:	124x124x127mm
Power	:	96W LED Chip
Light source	:	96pcs 1W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R65 Amber Class 2, ECE R10
SAE Approval	:	SAE J845
Other Approval	:	CE, CISPR 25 Class 5
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Amber or Clear
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	8pcs/ctn, 7.48kg, 34x34x35cm (B7) 8pcs/ctn, 9.88kg, 38x38x35cm (B7-1)


Certificates:


Patent No.	**ZL202223088196.3**
CISPR 25	**Class 5**
ECE R65	**Class 2**
60G	**Anti-Shock Rating**
SAE J845	**Class 1**
5 Year	**Warranty**
IP69K	**Protection**

HD pictures link:

www.hobartlights.com/product/html/?194.html
www.hobartlights.com/product/html/?208.html







2.3 TIMES BRIGHTER


ECE R65 class 2 includes 2 levels of brightness: by day and by night. By day is 2.3 times brighter than by night.
Beacon with class 2 can be used not only at night, but also legally during the day.

ECE R65 class 1 has only one level of brightness: by night.
Beacon can't be used during the day legally.

Category T or Category HT			Colour		
			amber	blue	red
Minimum value of the effective luminous intensity J_e, within the specified vertical angles and a horizontal angle of 360° around the reference axis (a) In the case of Category T, a horizontal angle of 360° around the reference axis (b) In the case of Category HT a horizontal angle of minimum ±135° relative to its horizontal reference axis	0°	by day (Class 1)	230	120	120
		by night (Class 2)	100	50	50
	±4°	by day (Class 1)	-	60	60
		by night (Class 2)	-	25	25
	±8°	by day (Class 1)	170	-	-
		by night (Class 2)	70	-	-
Maximum value of the effective luminous intensity J_e	Inside ±2°	by day (Class 1)	1 700		
		by night (Class 2)	700		
	Inside ±8°	by day (Class 1)	1 500		
		by night (Class 2)	600		
	Outside the above areas	by day (Class 1)	1 000		
		by night (Class 2)	300		

HIGH SPEED TEST (200km/h)

At a speed of 200km/h, test whether the position of the beacon will shift.
Type: Magnetic Beacon & Vacuum Sucker Beacon.
Base: Built-in magnet, D66 magnet with sucker, D88 magnets, 4.5inch vacuum sucker

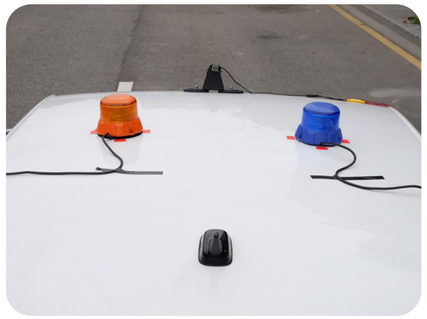

EMERGENCY BRAKING TEST

Emergency braking at different speeds (40km/h, 60km/h, 80km/h, 100km/h), test whether the position of the beacon will shift.
Type: Magnetic Beacon & Vacuum Sucker Beacon.
Base: Built-in magnet, D66 magnet with sucker, D88 magnets, 4.5inch vacuum sucker




CISPR 25 CLASS 5 HIGHEST LEVEL

CISPR 25 Class 5 is currently the highest level of EMC. This beacon uses the best electronic components, making it extremely resistant to electromagnetic interference, while producing only a very small amount of electromagnetic radiation.
It can be simply explained that it can work normally in a relatively harsh electromagnetic environment, and at the same time, it cannot radiate excessive electromagnetic waves to interfere with the normal operation of other surrounding devices and networks.

So it can work in any harsh conditions.

CISPR 25 Class 1	Relatively poor EMC
CISPR 25 Class 2	Middle EMC (ECE R10 is about this level)
CISPR 25 Class 3	Good EMC
CISPR 25 Class 4	Great EMC
CISPR 25 Class 5	Best EMC




WHY 3.5MM ALUMINUM ALLOY?

Better Cooling System

The thermal conductivity of aluminum alloy is 600 times that of PC ABS PMMA, and the heat generated inside the beacon can be quickly dissipated from the bottom and top directions. Especially in rainy weather, the heat on the top of the beacon will be carried away with the rain. This allows beacons to quickly dissipate heat even in a high temperature working environment, avoiding the reduction of brightness due to overheating and the failure of the chip's light source.


Material	Thermal Transmissivity (W/(m·K))
Aluminum Alloy	121-151W/mK
PC	0.2W/mK
ABS	0.25W/mK
PMMA	0.14～0.2W/mK

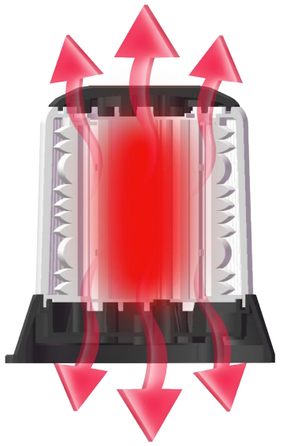


Better Vibaration Resistance

Vibration Standard:
GB 2423.10 Sinusoidal
Vibration, IEC 60068 (60G)

Another reason why we use 3.5mm aluminum alloy housing and top is to build a stronger and tougher product to adapt to different working environments.
Material and mechanical structure design is the most critical!

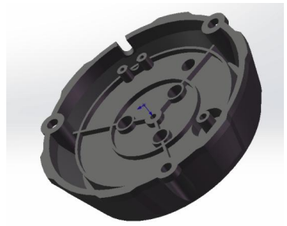

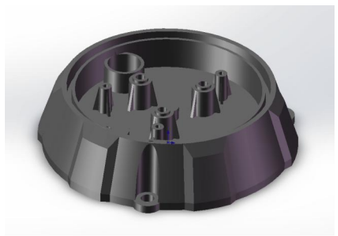



Cast Alloy Top + Base
60G Mechanical Shock Test
Heavy Duty Design

Our Screws
M6




Other company's screws
Self-tapping




Synchronously Flash

Positive	Red Cable
Negative Ground	Black Cable
Synchronously flash & patterns selection	Yellow Cable
Asynchronously flash	Green Cable

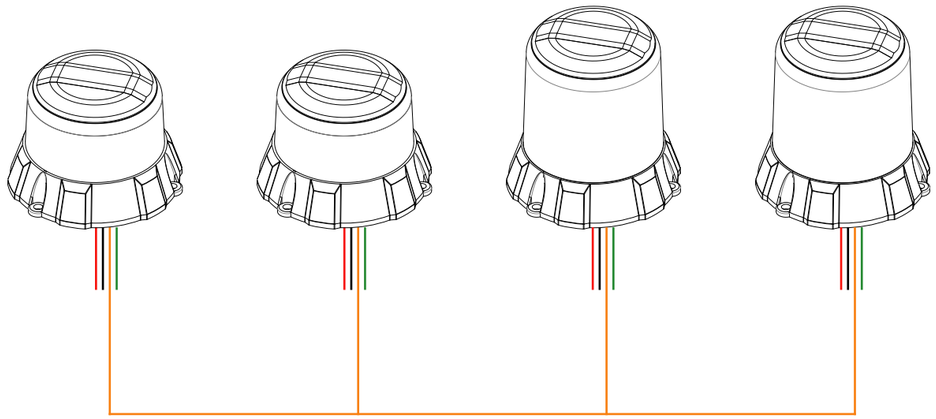

All the beacons flash synchronously

Asynchronously Flash

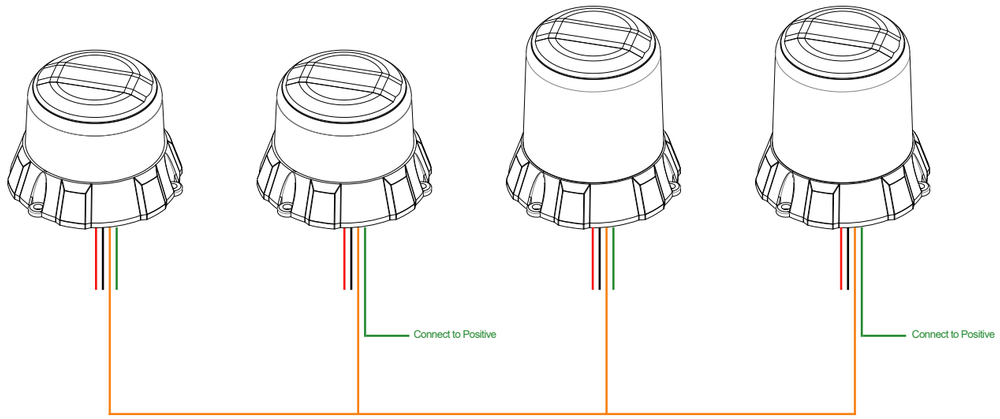

Group 1 (Beacon 1 & Beacon 3) will flash in synchronously
Group 2 (Beacon 2 & Beacon 4) will flash in synchronously

Group 1 and Group 2 will flash in asynchronously

Magnet Base Options



44mm magnet
pull strength: 8.5kg
D44-8.5kg



66mm magnet
pull strength: 32kg
D66-32kg



88mm magnet
pull strength: 30kg
D88-30kg

Din Mount Bracket



DMB1



DMB2



DMB3



DMB4



DMB6



DMB7



DMB8



DMB9




DMB11

B5-4T / B5T
Rechargeable Beacon

EXCLUSIVE
CA, FI








Specification:


Part No.	:	B5-4T
Size	:	109x109x87mm
Power	:	36W LED Chip
Battery	:	Rechargeable Lithium Battery
Capacity	:	7.4V, 4000mAh 28.8Wh
Working hours	:	10 hours
Charging hours	:	6 hours
Light source	:	24pcs 1.5W LED
Waterproof	:	IP66
Flashing patterns	:	10 Patterns
Approval	:	ECE R65 R10, SAE, CE
Maximum speed limit	:	200km/h
Voltage	:	10-30V
Housing Material	:	Aluminum, PC
Mounting	:	32KG Magnetic pull force base
Control	:	Remote
Warranty	:	3 Years
Working Temp	:	-45°C ~ +65°C


Part No.	:	B5T / B5T-1
Size	:	111x111x54.6mm
Power	:	36W LED Chip
Light source	:	24pcs 1.5W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Available
Asynchronization	:	Available
Approval	:	ECE R65, ECE R10, CE
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Smokey
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

HD pictures link:

https://hobartlights.com/product/class/?48.html







B6T / B7T
Black Version Beacon
Smokey Lens

EXCLUSIVE
FI








Specification:

Part No.	:	B6T / B6T-1
Mounting	:	Bolt Mount / Magnetic base
Size	:	124x124x89mm
Power	:	48W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10, ECE R65 class 2
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Smokey
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Part No.	:	B7T / B7T-1
Mounting	:	Bolt Mount / Magnetic base
Size	:	124x124x127mm
Power	:	96W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10, ECE R65 class 2
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Smokey
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C







Blue Beacon
B5b



Specification:


Part No.	:	B5b / B5b-1
Size	:	111x111x54.6mm
Power	:	36W LED Chip
Light source	:	24pcs 1.5W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Available
Asynchronization	:	Available
Approval	:	ECE R65, ECE R10, CE
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Blue or Clear
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C


Certificates:


60G	**Anti-Shock Rating**
ECE R65	**approved**
ECE R10	**Approved**
SAE J845	**Class 1**
5 Year	**Warranty**
IP69K	**Protection**

HD pictures link:

https://hobartlights.com/product/class/?45.html







Blue Beacon
B6b / B7b








Specification:

Part No.	:	B6b / B6b-1
Mounting	:	Bolt Mount / Magnetic base
Size	:	124x124x89mm
Power	:	48W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10, ECE R65 TB2
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Blue or Clear
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Part No.	:	B7b / B7b-1
Mounting	:	Bolt Mount / Magnetic base
Size	:	124x124x127mm
Power	:	96W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10, ECE R65 TB2
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Blue or Clear
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C







Red Beacon
B5r



Specification:


Part No.	:	B5r / B5r-1
Size	:	111x111x54.6mm
Power	:	36W LED Chip
Light source	:	24pcs 1.5W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Available
Asynchronization	:	Available
Approval	:	ECE R65, ECE R10, CE
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Red or Clear
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C


Certificates:


60G	**Anti-Shock Rating**
ECE R65	**approved**
ECE R10	**Approved**
SAE J845	**Class 1**
5 Year	**Warranty**
IP69K	**Protection**

HD pictures link:

https://hobartlights.com/product/class/?46.html







Red Beacon
B6r / B7r








Specification:

Part No.	:	B6r / B6r-1
Mounting	:	Bolt Mount / Magnetic base
Size	:	124x124x89mm
Power	:	48W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10, ECE R65 TR2
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Red or Clear
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Part No.	:	B7r / B7r-1
Mounting	:	Bolt Mount / Magnetic base
Size	:	124x124x127mm
Power	:	96W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10, ECE R65 TR2
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Blue or Clear
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C







B6g / B6g-1
HEAVY DUTY BEACON



Screw Mount
0.4m cable
Lead wire



Magnet Mount
3m cable
Double switch cigarette lighter

Specification:


Part No.	:	B6g / B6g-1
Size	:	124x124x89mm
Power	:	48W LED Chip
Light source	:	48pcs 1W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Green
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	8pcs/ctn, 6.1kg, 38x38x27cm (B6g) 8pcs/ctn, 7.96kg, 38x38x27cm (B6g-1)


Certificates:


60G	**Anti-shock rating**
Synchronization	**Available**
Asynchronization	**Available**
Green or Black	**Housing**
Green	**Lens**
IP69K	**Waterproof**

HD pictures link:

http://www.hobartlights.com







B7g / B7g-1
HIGH PROFILE BEACON (2 LAYERS)



Screw Mount
0.4m cable
Lead wire



Magnet Mount
3m cable
Double switch cigarette lighter

Specification:

Part No.	:	B7g / B7g-1
Size	:	124x124x127mm
Power	:	96W LED Chip
Light source	:	96pcs 1W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC & ASYNC function
ECE Approval	:	ECE R10
Other Approval	:	CE, UKCA
Anti-shock rating	:	60G
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Lens Material	:	UV resistant PC Lens
Lens Color	:	Green
Mounting	:	Bolt Mount / Magnetic base
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	8pcs/ctn, 7.48kg, 34x34x35cm (B7g) 8pcs/ctn, 9.88kg, 38x38x35cm (B7g-1)


Certificates:


High Profile	**2 Layers**
Synchronization	**Available**
Asynchronization	**Available**
Green or Black	**Housing**
Green	**Lens**
IP69K	**Waterproof**


HD pictures link:

www.hobartlights.com

Size:








EXCLUSIVE
FI


B5-2
Low profile DIN Mount Beacon



Specification:

Part No.	:	B5-2
Size	:	111x111x150mm
Power	:	36W LED Chip
Light source	:	24pcs 1.5W LED
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 Amber Class 2, ECE R10
SAE Approval	:	SAE J845 Class 1
Other Approval	:	CE, UKCA
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Housing Color	:	Orange or Black
Lens Material	:	PMMA Lens
Lens Color	:	Amber or Clear
Mounting	:	Din mount
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	8pcs/ctn





HD pictures link:

https://hobartlights.com/product/html/?228.html


B6-2
High profile DIN Mount Beacon






Specification:

Part No.	:	B6-2 /B7-2
Size	:	124x124x179mm /124x124x217mm
Power	:	48W /96W LED Chip
Waterproof	:	IP67, IP69K
Flashing patterns	:	12 Patterns
ECE Approval	:	ECE R65 Amber Class 2, ECE R10
SAE Approval	:	SAE J845 Class 1
Other Approval	:	CE, UKCA
Voltage	:	10-30V
Housing Material	:	Robust Aluminium Housing
Housing Color	:	Orange or Black
Lens Material	:	PC
Lens Color	:	Amber or Clear
Mounting	:	Din Mount
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C
Package	:	8pcs/ctn

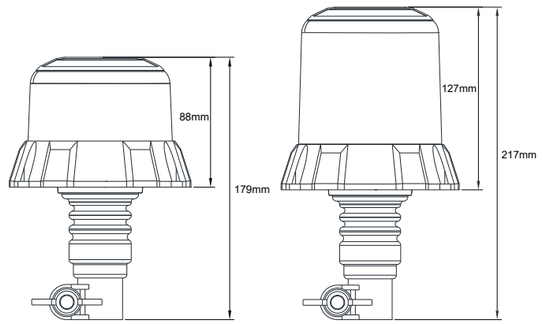

HD pictures link:

https://hobartlights.com/product/html/?229.html
https://hobartlights.com/product/html/?230.html



B2
Economic Beacon



B2



B2-1





B2-2

Specification:

Part No.	:	B2
Size	:	130x130x91mm
Power	:	16W
Light source	:	32pcs 0.5W LED
Waterproof	:	IP67
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC function
ECE Approval	:	ECE R65 Class 1, ECE R10
SAE Approval	:	SAE J845
Other Approval	:	CE
Voltage	:	10-30V
Material	:	ABS housing, PC lens
Color option	:	Amber, Blue, Red, Green
Mounting	:	Bolt Mount / Magnet Mount / Din Mount
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Size:

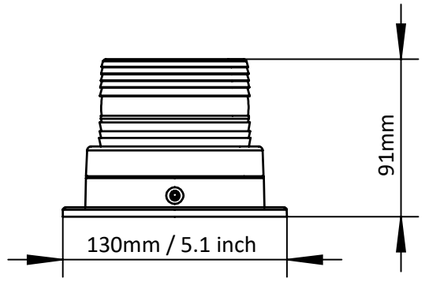

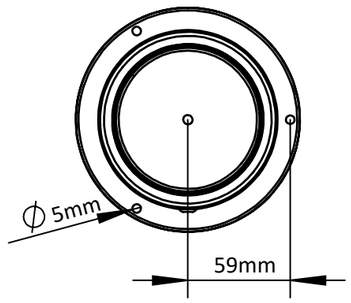

B3
Economic Beacon / 6.4inch



B3



B3-1





B3-2

Specification:

Part No.	:	B3
Size	:	162x162x120mm
Power	:	32W
Light source	:	32pcs 1W LED
Waterproof	:	IP68
Flashing patterns	:	12 Patterns
Synchronization	:	Have SYNC function
ECE Approval	:	ECE R65 Class 1, ECE R10
SAE Approval	:	SAE J845
Other Approval	:	CE
Voltage	:	10-30V
Material	:	ABS housing, PC lens
Color option	:	Amber, Blue, Red, Green
Mounting	:	Bolt Mount / Magnet Mount / Din Mount
Cable	:	0.4M / 3M cable
Control	:	Lead wire or Cigarette lighter
Warranty	:	5 Years
Working Temp	:	-45°C ~ +65°C

Size:

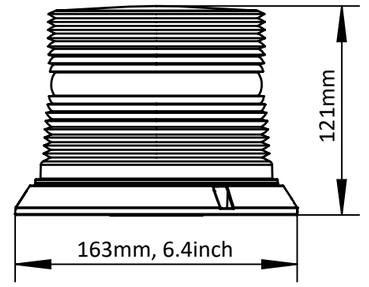

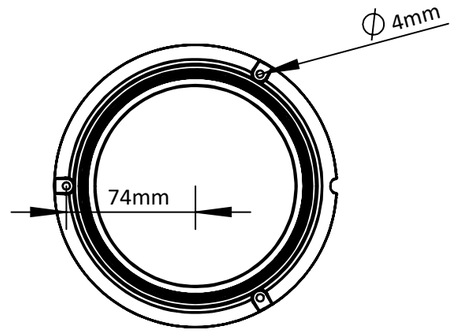


Certificates Testing

HOBART®

Optical Testing


- ECE R65 (T, X), R148 (Signal Lights), R149 (Hi-Lo Beam)
- SAE J845 (360 degree) , SAE J595 (180 degree)
- DOT FMVSS 108, High beam Low beam

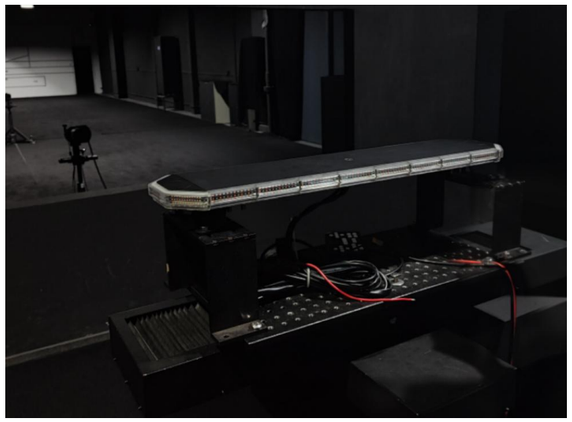








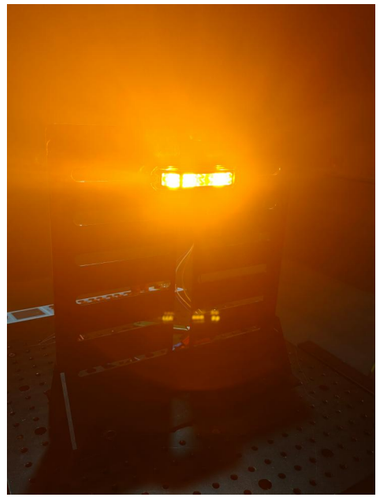





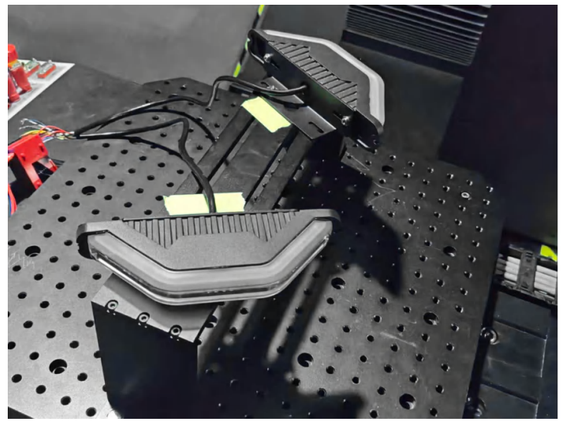



EMC

- Electromagnetic compatibility
- CE / UKCA / ECE R10 / CISPR 25

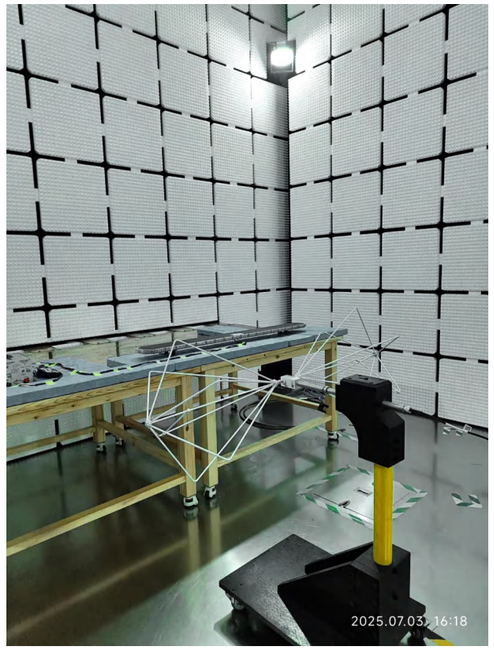

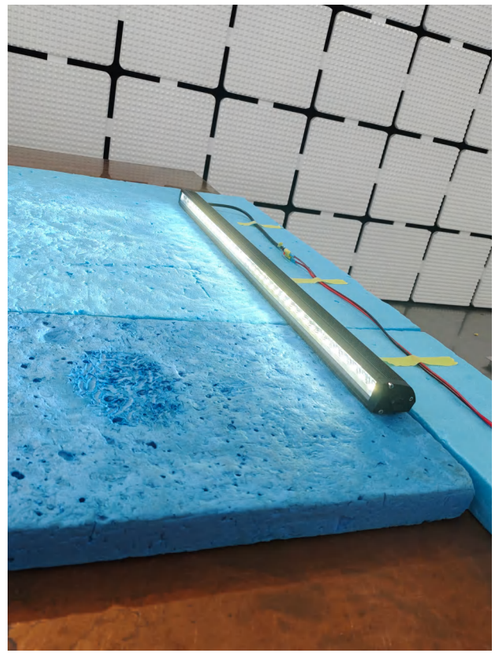

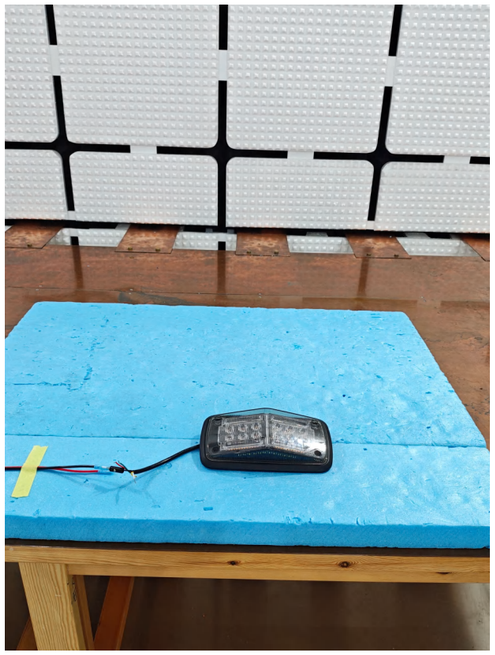

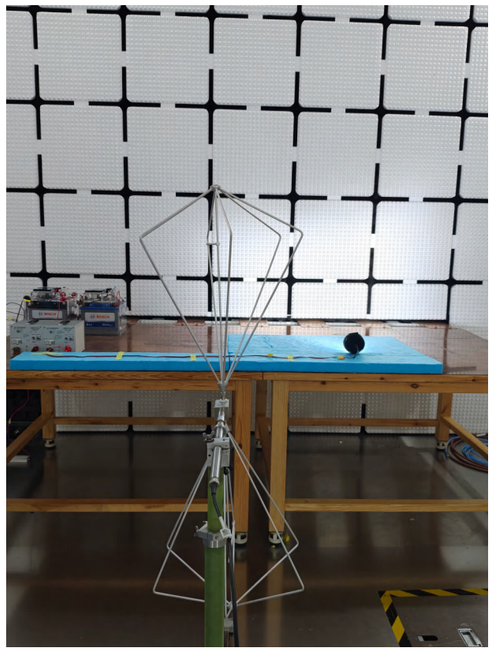

IP69K

- Protection against high-pressure,
- high-temperature water wash-downs



https://youtu.be/PIO-1iRCbVY?si=2Im0QiLx2pQKJqOW

Scan QR Code
to see video



https://youtu.be/cjCMtgZ8HWQ?si=FUcWA5_nDahcGJkg

Scan QR Code
to see video


IP68

- Immersion, 1 meter (3 ft 3 in) or more depth





CISPR 25

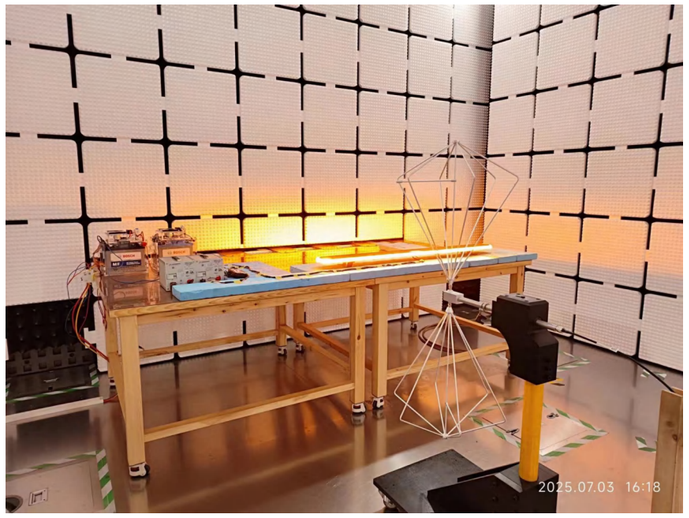


Immunity of ESAs to transient disturbances




Emission of transient conducted disturbances



Immunity of ESAs to transient disturbances

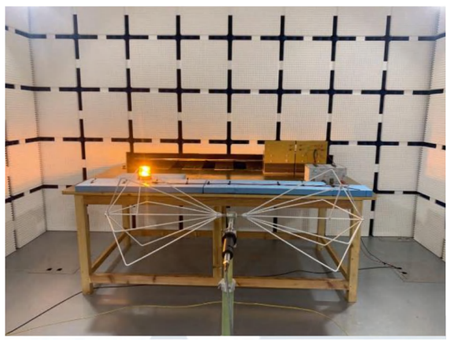

Immunity of ESAs to electromagnetic radiation

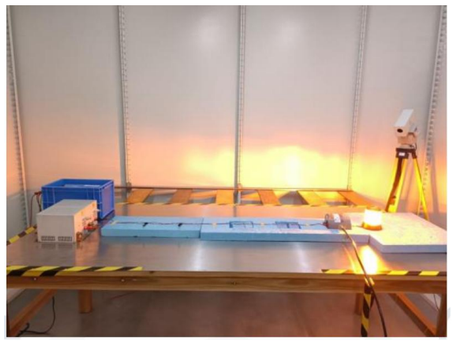

60G Shock tests

Video link: https://youtu.be/mICjcWolS9A?si=aqH6xMqI41ZBTY7X

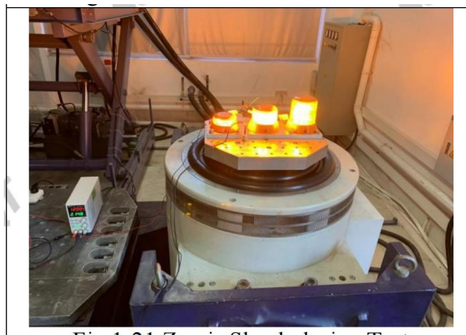


Fig.1-21 Z axis Shock during Test

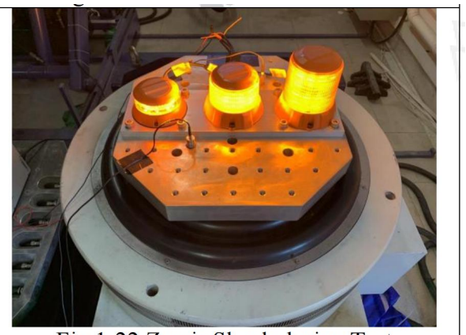


Fig.1-22 Z axis Shock during Test

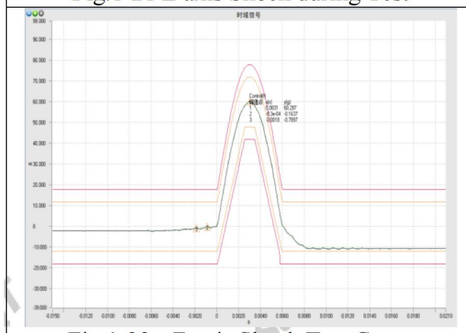


Fig.1-23 +Z axis Shock Test Curve

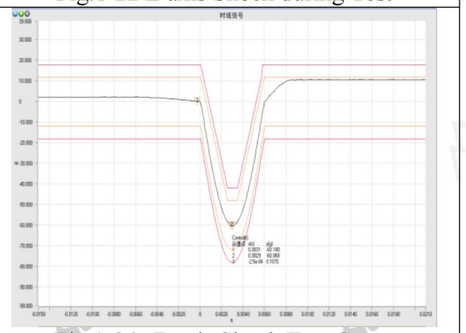


Fig.1-24 -Z axis Shock Test Curve

Vibration test

Video Link: https://youtu.be/3n-3RvA-KM8



Patents

Utility model patent certificate
Appearance design patent certificate



DOT

AUTOMOTIVE MANUFACTURERS EQUIPMENT COMPLIANCE AGENCY, INC.

AMECA NOTICE OF EQUIPMENT COMPLIANCE™

AMECA

This notice verifies that the item described below has been tested by an accredited laboratory and has been found to be in compliance with the jurisdictional standard(s) listed below where applicable. The issuance of this AMECA Notice of Equipment Compliance™ does not denote or imply any endorsement or recommendation of the item described below. AMECA does not warranty or guaranty parts. Parts warranties are between the buyer and seller and can vary by state and jurisdictions involved.

Notification Number: 260966 Test Report Date: June 17, 2026

Expiration Date: July 1, 2029

Applicant: Guangzhou Hobartlights Limited
Building D1112, Asian Games Avenue No. 1211, Panyu
Guangzhou, Guangdong 511441
P. R. China

Item: "T8" - Combination Stop, Tail, Turn Signal and Backup Lamp - Red and White in Colour

Use: On Motor Vehicles

Jurisdictional Compliance Standard(S)
Identical To: United States FMVSS 571.108

Markings	Lens	Housing
	HOBART LIGHTS T8 DOT SAE I6S2T2R 26 12V	(None)
Light Source	Turn Signal Lamp: 80 LED's, 12V	
	Backup Lamp: 11 LED's, 12V	
	Stop Lamp: 80 LED's, 12V	
	Tail Lamp: 80 LED's, 12V	

Test Lab: Guangzhou Shuntai Quality Technical Service Co., Ltd.
Report Number: SQT2606136

Executive Director

"AMECA", "AMECA Edge Code" (for automotive brake friction material); and the AMECA Logo are trademarks registered with the US Patent & Trademark Office and with the US Department of Homeland Security - Customs and Border Patrol. These trademarks are solely owned by Automotive Manufacturers Equipment Compliance Agency, Inc. and may not be used without the express written permission of AMECA.

Form EC-1 Rev. 1/2017

FCC

Certificate • 認証証書 • 인증증서 • diplômes • CertificadO • Свидетельство

FCC Supplier's Declaration of Conformity

Certificate No.: STS2211134EF

Product	:	Wireless Tail light
Brand	:	Hobart Lights
Model(s) No.	:	T1, T1-1, T1-2, T1-3, T1-4, T1-5, T1-6, T1-7, T1-8
Holder	:	GUANGZHOU HOBART LIGHTS LIMITED
Address	:	309, No. 2, Shafeng 3rd Road, Jinsha Street, Baiyun District, Guangzhou, China
Manufacturer	:	GUANGZHOU HOBART LIGHTS LIMITED
Address	:	309, No. 2, Shafeng 3rd Road, Jinsha Street, Baiyun District, Guangzhou, China

Is here with confirmed to comply with requirements set out in the FCC Rules and Regulations Part 15 Subpart B and the measurement procedures were according to ANSI C63.4-2014.The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

Standard(s) : **FCC Part 15 Subpart B**

Test Report No. : **STS2211134E01**

Approved by: **02 Dec. 2022** **Department Manager**

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com

ECE R65 R148 R149 / SAE

- B5 ECE R65 Amber Certificate.pdf
- B5b ECE R65 Blue Certificate.pdf
- B6 ECE R65 TA2 Class 2 Certificate.pdf
- B6b R65 certificate.pdf
- B6r R65 certificate.pdf
- B7 ECE R65 TA2 Class 2 Certificate.pdf
- B7b R65 certificate.pdf
- B7r R65 certificate.pdf
- L3a Amber R65 TA2 certificate.pdf
- L3a R65 Amber test report.pdf
- L3b Blue R65 TB2 certificate.pdf
- L3r Red R65 TR2 certificate.pdf
- LH1-4 Amber R65 certificate.pdf
- LH1-4b Blue R65 certificate.pdf
- LH1-4r Red R65 certificate.pdf
- LH1-6 Amber R65 certificate.pdf
- Beacon ECE R10.pdf
- L3 ECE R10 Certificate.pdf
- LH1 ECE R10 certificate.pdf
- NB1 ECE R10 certificate.pdf
- Q5 R10 certificate.pdf
- SL1 ECE R10 EMC.pdf
- SL5 ECE R10 Certificate.pdf
- WL64 ECE R10 Certificate.pdf
- SL1 ECE R148 (reversing certificate).pdf
- T1 R148 Certificate.pdf
- B5 SAEJ 845 yellow-Class 1A Certificate.pdf
- B6 SAEJ 845 yellow-Class 1A Certificate.pdf
- B7 SAEJ 845 yellow-Class 1A Certificate.pdf
- L3 SAE Certificate.pdf
- SL1-1 SAE J595 yellow Class 1A.pdf
- FCC Certificate_STS2211134EF.pdf

CE UCKA

- Beacon CE Certificate (CE).pdf
- CE for battery (B5-4).pdf
- CE report for battery (B5-4).pdf
- L3 L5 L6 W5 LH1 CE Certificate.pdf
- NB1 CE Certificate.pdf
- NB1 UKCA Certificate.pdf
- Q5 CE Certificate.pdf
- SL1 CE Certificate.pdf

CISPR 25

- Beacon CISPR 25 Class 5 certificate.pdf
- L3 CISPR 25 Class 4 Certificate.pdf
- SL1-3 (dim function) CISPR25 Class 5 certificate.pdf
- SL1-3 CISPR25 Class 4.pdf
- WL64 CISPR25 certificate.pdf
- SL5 CISPR25 Class 4 .pdf
- Lightbar CISPR 25 Certificate.pdf
- Tail Light CISPR 25 Class 4 Certificate.pdf

FAQ
常问问题

ABOUT ORDER

Q What's the MOQ (Minimum order Quantity)?

A If we have inventory, we will not need MOQ requirement

Q How about the Delivery time?

A 45 days for regular bulk order.
1-2 week for standard sample order

Q What's your terms of payment?

A 30% deposit, 70% balance payment.
Accepted Payment Currency: RMB, USD, EUR, GBP, CAD, AUD, HKD.
Accepted Payment Type: T/T bank account, Paypal, credit card, USA local account, Europe local account.

Q What shipping channels do you provide?

A Express (UPS, DHL, TNT, FEDEX)
Sea shipment (FOB, CIF, DDU, DDP, EXW)
Air shipment, welcome to ask for a quote.

Q How is the waterproof standard of the product defined?

A You can see the meaning IP65, IP66, IP67, IP68, IP6K9K here:
https://en.wikipedia.org/wiki/IP_Code

ABOUT CUSTOMIZATION

Q Can you produce according to customers' design?

A Yes, OEM and ODM is what we deal with. Bring your idea to us,
we can make a 3D prototype for you

Q What is the MOQ (Minimum order Quantity) for OEM&ODM project?

A 200pcs for first order
Different products are different, see specific products

Q Can we do our own color box and put our brand logo on the products?

A Yes, logo on products is available
Colox box is available, MOQ is 500pcs for color box, We can provide free color box design


Package / Die Cut Size / Color Box Cost

Category	Part number	pcs/Carton	Carton Weight	Carton Size L* W * H			Inter box L* W * H			Color box 500pcs USD/pc	Color box 1000pcs USD/pc
Scene Light	SL1-1	20pcs/ctn	9.2kg	49.5cm	27.5cm	37cm	255mm	95mm	85mm	$0.55	$0.36
	SL1-3	20pcs/ctn	8.4kg	49.5cm	27.5cm	37cm	255mm	95mm	85mm	$0.55	$0.36
	SL1-3	40pcs/ctn	16.3kg	51.5cm	48cm	35cm	255mm	95mm	85mm	$0.55	$0.36
	SL5	100pcs/ctn	12.1kg	52.5cm	27cm	26cm	50mm	50mm	120mm	$0.39	$0.20
	SL6	20pcs/ctn	18.1kg	49.5cm	27.5cm	37cm	255mm	95mm	85mm	$0.55	$0.36
Beacon	B5	12pcs/ctn	5.8kg	28.5cm	28.5cm	27.5cm	135mm	135mm	85mm	$0.46	$0.31
	B5-1	12pcs/ctn	9kg	36.5cm	34.5cm	27.5cm	175mm	165mm	85mm	$0.62	$0.43
	B5-2	8pcs/ctn	6.4kg	37.5cm	28.5cm	28cm	180mm	135mm	130mm	$0.60	$0.41
	B5-4	12pcs/ctn	9.5kg	48.5cm	32.5cm	26cm	155mm	155mm	120mm	$0.61	$0.42
	B6	8pcs/ctn	6.2kg	33.5cm	33.5cm	28cm	155mm	155mm	120mm	$0.61	$0.42
	B6-1	8pcs/ctn	7.98kg	36.5cm	36.5cm	26cm	175mm	175mm	120mm	$0.66	$0.47
	B6-1	12pcs/ctn	12.85kg	36.5cm	36.5cm	38.5cm	175mm	175mm	120mm	$0.66	$0.47
	B6-2	8pcs/ctn	9kg	44.5cm	30.5cm	30cm	215mm	145mm	140mm	$0.65	$0.47
	B7	8pcs/ctn	7.48kg	34cm	34cm	35cm	155mm	155mm	160mm	$0.63	$0.44
	B7-1	8pcs/ctn	10.1kg	36cm	36cm	33cm	175mm	175mm	160mm	$0.69	$0.50
	B7-2	8pcs/ctn	10.2kg	52.5cm	30.5cm	30cm	255mm	145mm	140mm	$0.68	$0.50
Work Light	WL64-4R	24pcs/ctn	11kg	38cm	34cm	31.5cm	162mm	122mm	72mm	$0.45	$0.30
	WL64-4S	24pcs/ctn	10.5kg	38cm	34cm	31.5cm	162mm	122mm	72mm	$0.45	$0.30
	WL64-6	24pcs/ctn	13kg	38cm	34cm	31.5cm	162mm	122mm	72mm	$0.45	$0.30
	WL64-9	20pcs/ctn		43cm	30cm	33cm	200mm	140mm	60mm	$0.58	$0.39
	WL64-16	20pcs/ctn		43cm	30cm	33cm	200mm	140mm	60mm	$0.58	$0.39
	WL64-15	20pcs/ctn	19kg	46cm	25cm	39cm	220mm	115mm	73mm	$0.55	$0.36
	WL66-2	50pcs/ctn	17.4kg	43cm	28.5cm	43.5cm	132mm	82mm	81mm	$0.43	$0.24
	WL66-4	24pcs/ctn	13.2kg	40.5cm	34.5cm	26.6cm	192mm	82mm	81mm	$0.44	$0.27
	WL67-2	50pcs/ctn	17kg	43cm	28.5cm	43.5cm	132mm	82mm	81mm	$0.43	$0.24
	WL67-4	24pcs/ctn	13.5kg	40.5cm	34.5cm	26.6cm	192mm	82mm	81mm	$0.44	$0.27
Light Head	LH1-3	100pcs/ctn	10.2kg	64cm	28cm	17.5cm	110mm	50mm	35mm	$0.41	$0.21
	LH1-4	100pcs/ctn	11.4kg	64cm	28cm	17.5cm	110mm	50mm	35mm	$0.41	$0.21
	LH1-6	100pcs/ctn	10.7kg	43cm	30cm	28cm	140mm	50mm	40mm	$0.41	$0.22
	LH1-12	70pcs/ctn	12.4kg	36cm	31.5cm	26cm	145mm	53mm	45mm	$0.42	$0.22
	LH2	70pcs/ctn	13kg	36cm	31.5cm	26cm	145mm	53mm	45mm	$0.42	$0.22
Tail Light	T1-C	16pcs/ctn	11.8kg	37.5cm	28.5cm	28cm	180mm	135mm	130mm	$0.63	$0.45
	T1	5pcs/ctn	12.2kg	51cm	35.5cm	30.5cm	310mm	173mm	sticker	$0.60	$0.45
	T2	5pcs/ctn	12.2kg	51cm	35.5cm	30.5cm	310mm	173mm	sticker	$0.60	$0.45
	T3	5pcs/ctn	11kg	51cm	35.5cm	30.5cm	310mm	173mm	sticker	$0.60	$0.45
	T6	10pcs/ctn	14.7kg	46cm	27.5cm	45.5cm	234mm	128mm	sticker	$0.45	$0.30
	T8	12pcs/ctn		48cm	40cm	44cm	230mm	190mm	70mm	$0.64	$0.45
C5	C5-B6	2pcs/ctn	13kg	122.5cm	34cm	26cm	1210mm	130mm	240mm	$2.10	$1.67
	C5-280	1pcs/ctn	6.63kg	122cm	23.5cm	22cm	don't have inter box			$2.55	$2.11
Lightbar	L3-180	20pcs/ctn	12.2kg	49.5cm	27.5cm	37cm	255mm	95mm	85mm	$0.55	$0.36
	L3-280	6pcs/ctn	13.7kg	44cm	36.5cm	35.5cm	355mm	250mm	105mm	$1.35	$0.95
	L3-280-1	6pcs/ctn	13.5kg	44cm	36.5cm	35.5cm	355mm	250mm	105mm	$1.35	$0.95
	L3-440	6pcs/ctn	18.9kg	52.5cm	52cm	35.5cm	515mm	250mm	105mm	$1.50	$1.09
	L3-440-1	6pcs/ctn	18.7kg	52.5cm	52cm	35.5cm	515mm	250mm	105mm	$1.50	$1.09
	L3-760	2pcs/ctn	13kg	85cm	27cm	24cm	835mm	250mm	105mm	$1.80	$1.38
	L3-1080	2pcs/ctn	16kg	117cm	27cm	24cm	1155mm	250mm	105mm	$2.10	$1.67
	L3-1240	2pcs/ctn	18kg	133.5cm	27cm	24cm	1315mm	250mm	105mm	$2.25	$1.82
	L3-1400	2pcs/ctn	19kg	149.5cm	27cm	24cm	1475mm	250mm	105mm	$2.40	$1.96
	L3-1560	2pcs/ctn	20kg	165.5cm	27cm	24cm	1635mm	250mm	105mm	$2.55	$2.11
	L3-1720	2pcs/ctn	21.3kg	181.5cm	27cm	24cm	1795mm	250mm	105mm	$2.70	$2.25
Alarm	E301	50pcs/ctn	21.3kg	44.5cm	31.5cm	24cm	115mm	82mm	85mm	$0.42	$0.23
	E302	20pcs/ctn	9.4kg	35cm	30cm	18cm	110mm	50mm	100mm	$0.41	$0.21
	E303	30pcs/ctn	10kg	36.5cm	28cm	18cm	115mm	82mm	85mm	$0.42	$0.23
	E306	20pcs/ctn	17.46kg	51cm	23.5cm	30cm	152mm	85mm	110mm	$0.44	$0.26
W5	W5-20	12 pcs/ctn		59.5cm	26cm	30.5cm	580mm	80mm	95mm	$1.17	$0.79
	W5-30	12 pcs/ctn		85cm	26cm	30.5cm	835mm	80mm	95mm	$1.29	$0.90
	W5-40	6 pcs/ctn		110.3cm	26cm	21cm	1088mm	80mm	95mm	$1.40	$1.01
	W5-48	6 pcs/ctn		131cm	26cm	21cm	1295mm	80mm	95mm	$1.50	$1.10
	W5-56	6 pcs/ctn		151cm	26cm	21cm	1495mm	80mm	95mm	$1.59	$1.19
Whip light	Q4-3ft	30 pcs/ctn	15.85 kgs	95.7	19	22.5	don't have inter box				
	Q5-1ft	24 pcs/ctn	22.1 kgs	77.5	27	26	470mm	85mm	60mm	$0.55	$0.39
	Q5-2ft	24 pcs/ctn	24.6 kgs	106.5	27	26	760mm	85mm	60mm	$1.09	$0.71
	Q5-3ft	24 pcs/ctn	27 kgs	135.5	27	26	1050mm	85mm	60mm	$1.19	$0.81
	Q8-4ft	6 pcs/ctn	11.9 kgs	163	22	16				$0.00	$0.00
	Q8-pole-2ft	12 pcs/ctn	13.5 kgs	69	9.5	7				$0.00	$0.00
Zone Light	H5	100pcs/ctn	11.6kg	65cm	28cm	17.5cm	110mm	50mm	35mm	$0.41	$0.21

New Products Under Tooling
Coming soon



T16
LED Side Marker
2026 Dec

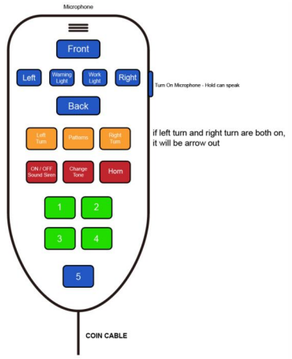


Siren controller
2026 Dec




SL7
Economic rechargeable
Scene Light
2026 Nov



LH4
Super Slim Lighthead
2026 Dec

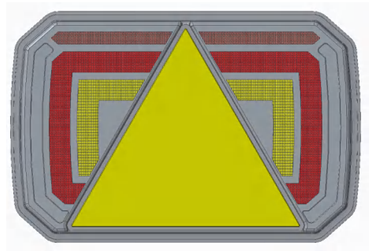

T13
Multifunctional Tail Lights
2027 Jan

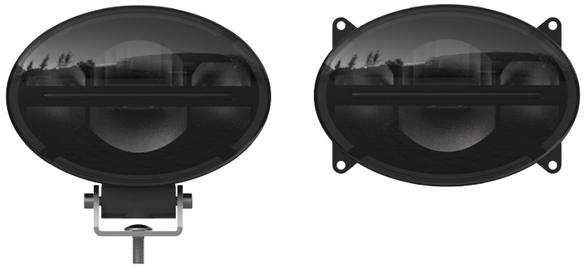

H1
Headlight
(low beam High beam)
2027 Jan



B1 Series
will launched in 2027 Feb