INSTRUCTIONS

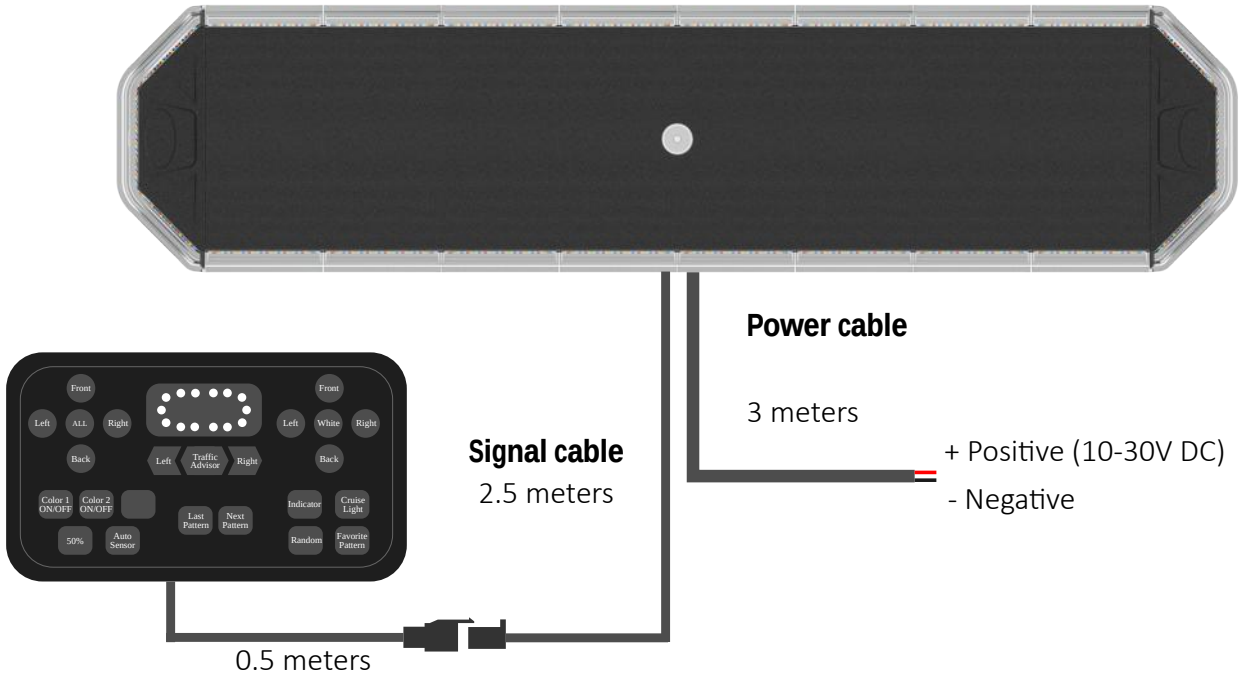

Single color flash patterns		FPM	MS	
1	Single Flash	150	400MS	单闪
2	Double Flash	150	400MS	双闪
3	Triple Flash	150	400MS	三闪
4	Quintuple Flash	75	800MS	五闪
5	Slow Single Flash	75	800MS	单闪 慢
6	Two adjacent groups flash alternately	150	400MS	相邻两组交替闪
7	Left and Right Flash alternately	150	400MS	整灯左右交替闪三闪
8	Rotation	-	-	顺时针旋转
9	Left Steady Burn (40%), Right Triple Flash	150	400MS	整灯左常亮 40%亮度 右三闪
10	Right Steady Burn (40%), Left Triple Flash	150	400MS	整灯右常亮 40%亮度 左三闪

* FPM means how many cycles in a minute

Dual color flash patterns		FPM	MS	
1	Single Flash	150 / 2	400MS * 2	单闪
2	Double Flash	150 / 2	400MS * 2	双闪
3	Triple Flash	150 / 2	400MS * 2	三闪
4	Quintuple Flash	75 / 2	800MS * 2	五闪
5	Slow Single Flash	75 / 2	800MS * 2	单闪 慢
6	Two adjacent groups flash alternately	150 / 2	400MS * 2	相邻两组交替闪
7	Left and Right Flash alternately	150 / 2	400MS * 2	整灯左右交替闪三闪
8	Rotation	-	-	顺时针旋转
9	Left Steady Burn (40%), Right Triple Flash	150 / 2	400MS * 2	整灯左常亮 40%亮度 右三闪
10	Right Steady Burn (40%), Left Triple Flash	150 / 2	400MS * 2	整灯右常亮 40%亮度 左三闪

* FPM means how many cycles in a minute

INSTRUCTIONS

1. Turn on Color 1 ON/OFF ,

2. Trun on ALL , and the will be be flashing, press next pattern to change pattern.

3. If you need dual color, please turn on Color 2 ON/OFF too.

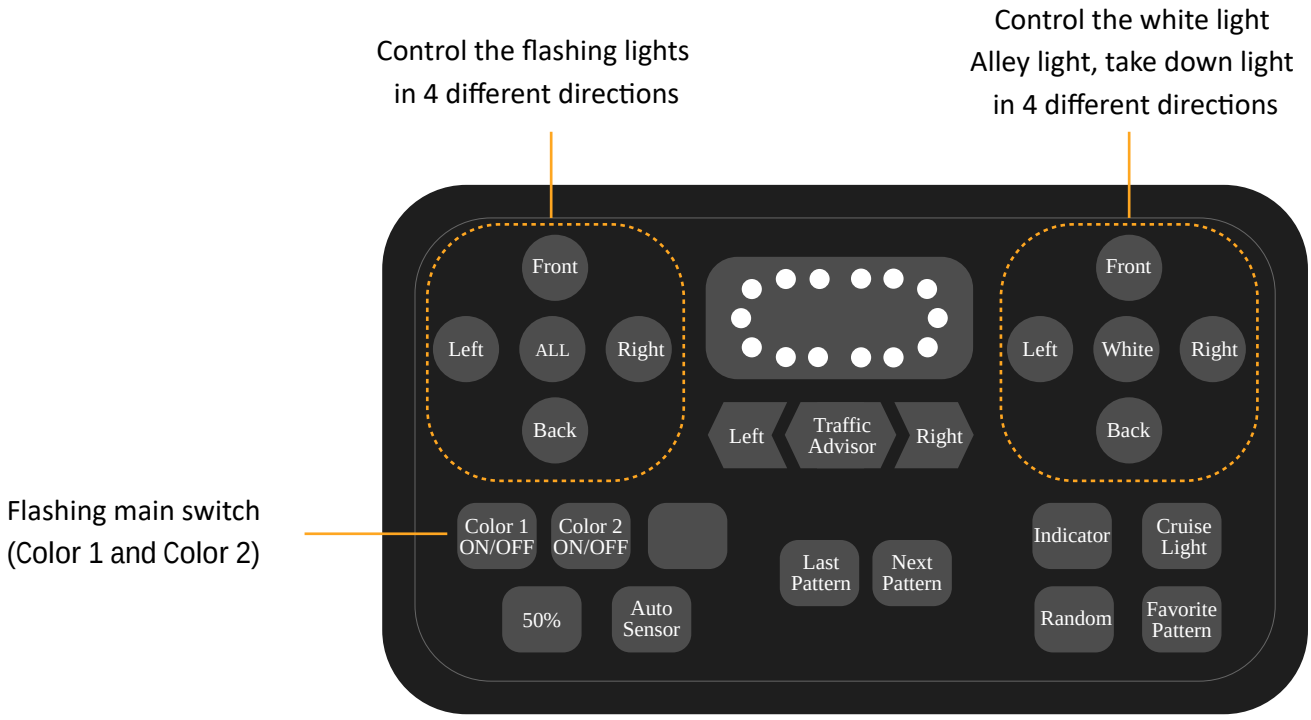

50%	Adjust brightness to 50%
Auto Sensor	Automatically senses day or night, automatically adjusts the brightness to 100% during the day and 50% at night, ECE R65 Class 2 (by day, by night), SAE J845 Class 1
Indicator	Turn off screen display
Cruise Light	Keep the warning lights in steady burn mode
Random	All flashing patterns mixed together and keep changing in every five cycles.
Favorite Pattern	You can customize your most commonly used or favorite pattern.
Left	Traffic advisor, directing vehicles to the left.
Traffic Advisor	Traffic advisor, directing vehicles to both sides.
Right	Traffic advisor, directing vehicles to the right